

**LM20,LM2825,LM35,LM45,LM50,LM60,LM62,
LM74,LM76,LM77,LM80,LM81,LM84**


Sensing and Monitoring for Control and Protection Seminar




Literature Number: SNIA010


Sensing and Monitoring for Control and Protection

Thermal Management in Electronic Systems

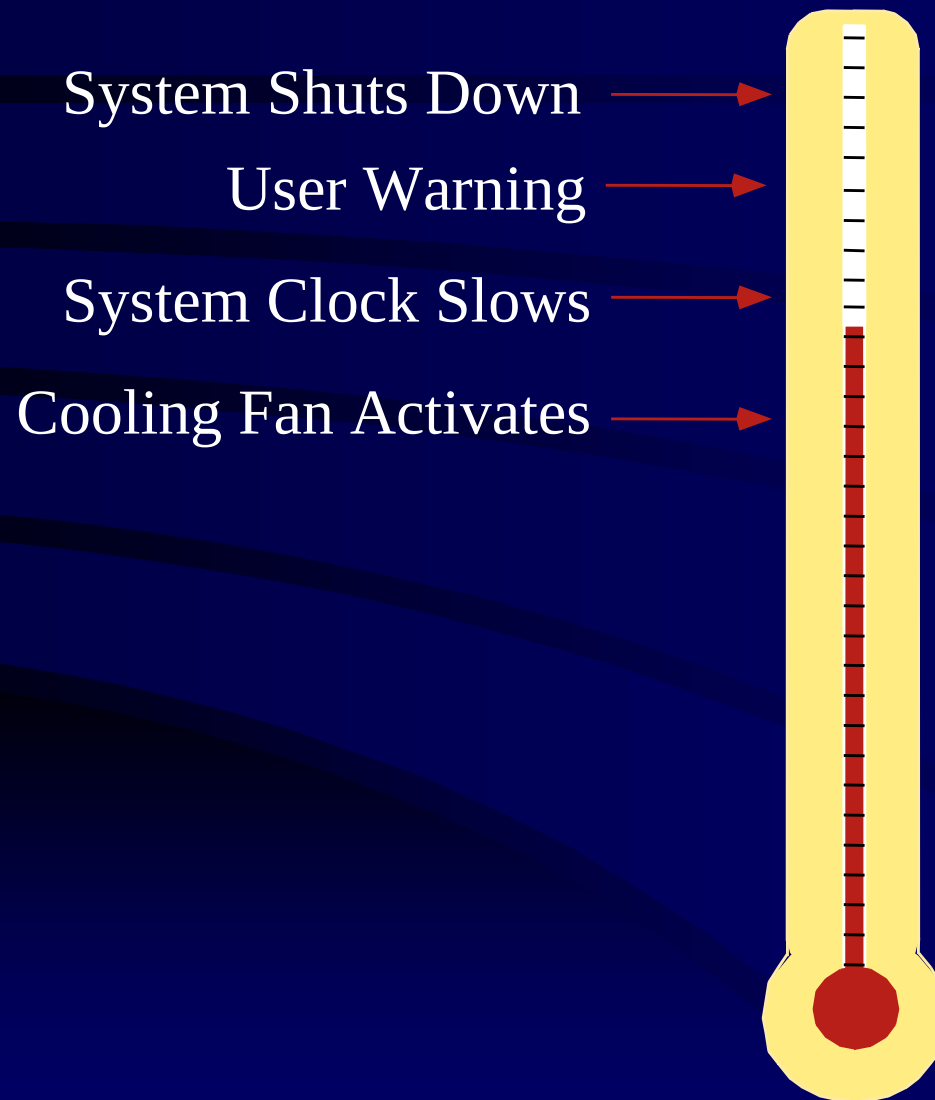

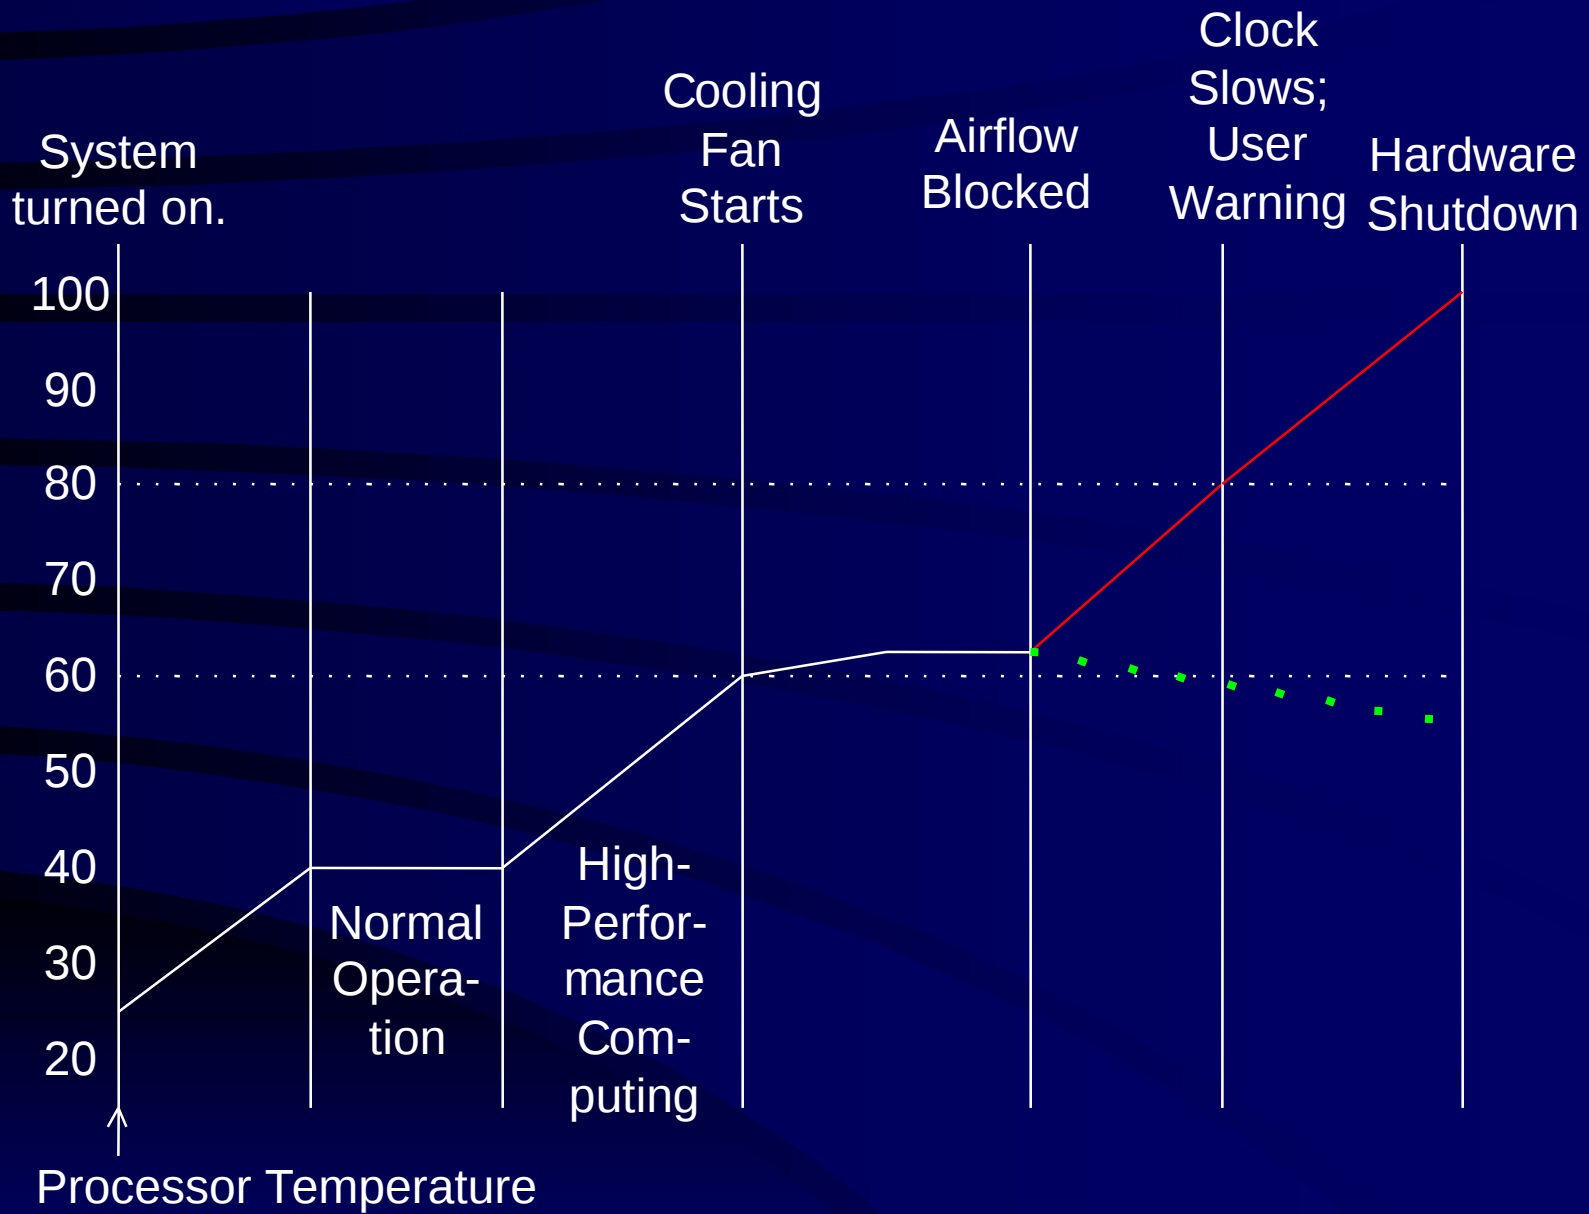

Single-Comparator Sensors

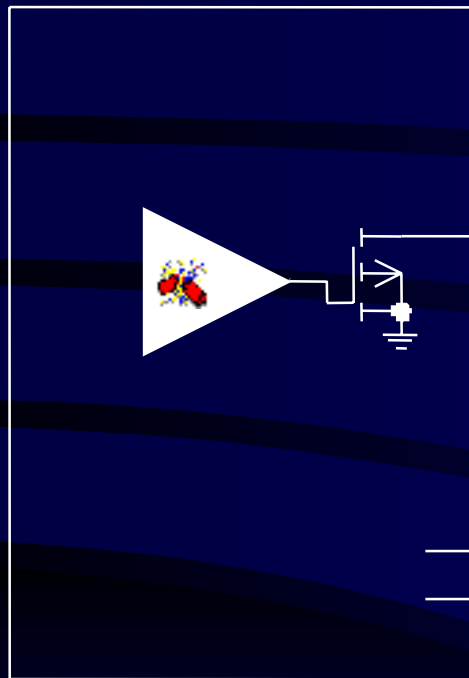


Shutdown or Interrupt

I²C or SMBus

	Optimized for Software Efficiency	Optimized for System Reliability
Overtemperature Alarms	Interrupts	Polling via I ² C or SMBus
Shutdown	Software-Controlled	Software-Controlled If software doesn't work: Hardware

Two Comparators, One Output


Similar, but you can also have low-temperature alarms.

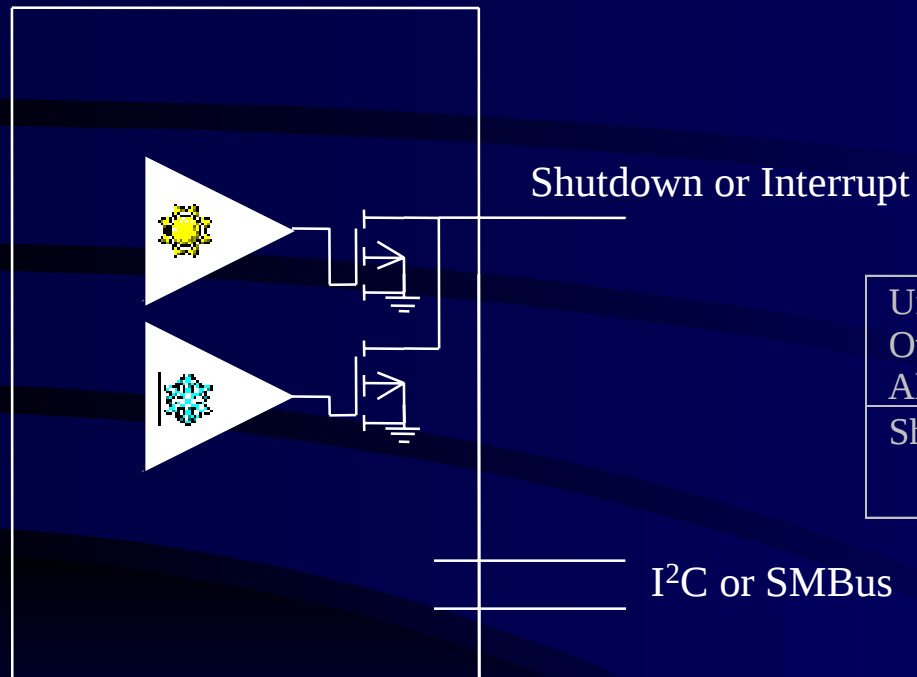


	Optimized for Software Efficiency	Optimized for System Reliability
Under- and Overtemperature Alarms	Interrupts	Polling via I ² C or SMBus
Shutdown	Software-Controlled	Software-Controlled If software doesn't work: Hardware

Two Comparators, Two Outputs

Efficient and Reliable

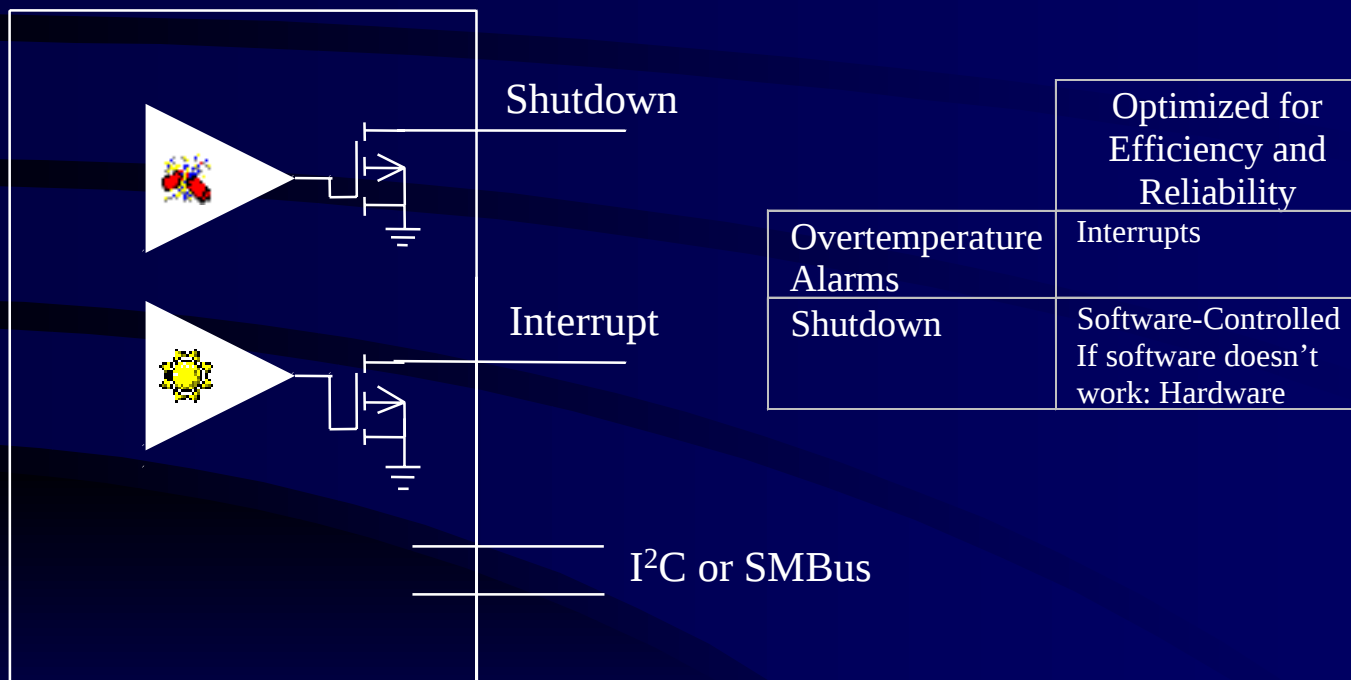


Three Comparators, Two Outputs

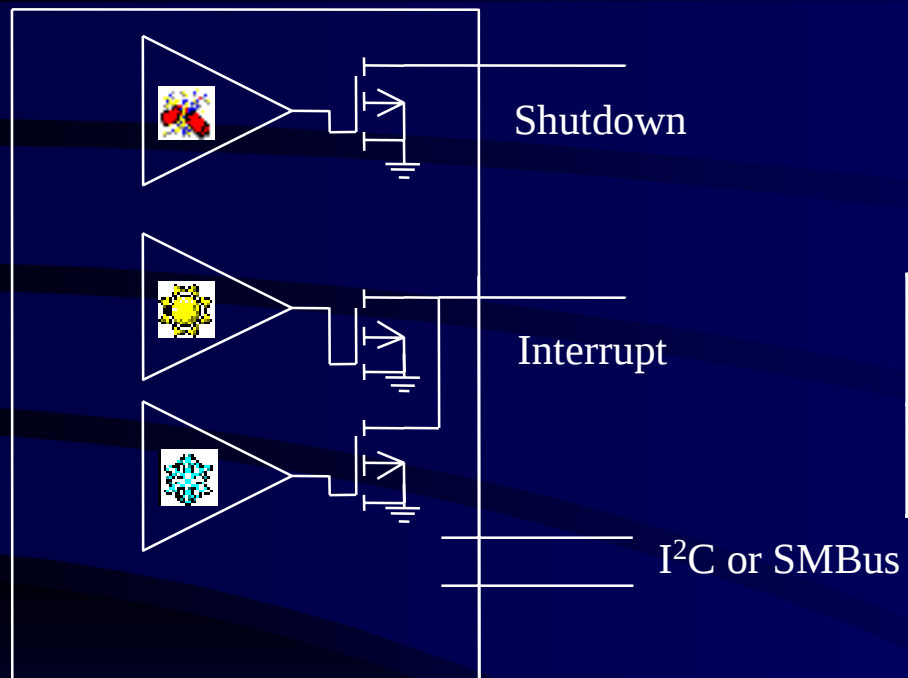


	Optimized for Efficiency and Reliability
Under- and Overtemperature Alarms	Interrupts
Shutdown	Software-Controlled If software doesn't work: Hardware


Digital Temperature Sensor Optimized for System Reliability

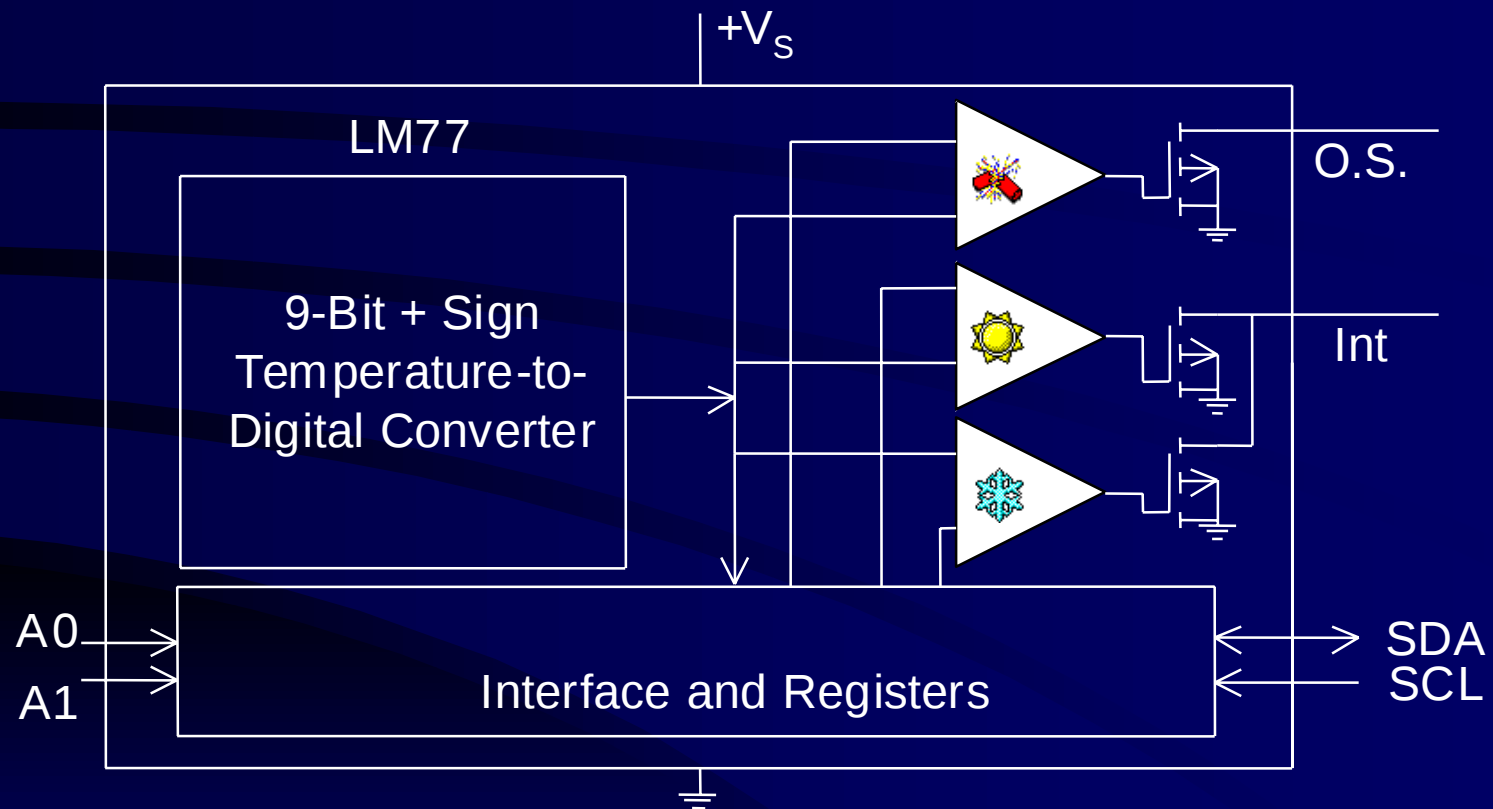


LM77 Provides Thermal Warning, Control, and Protection

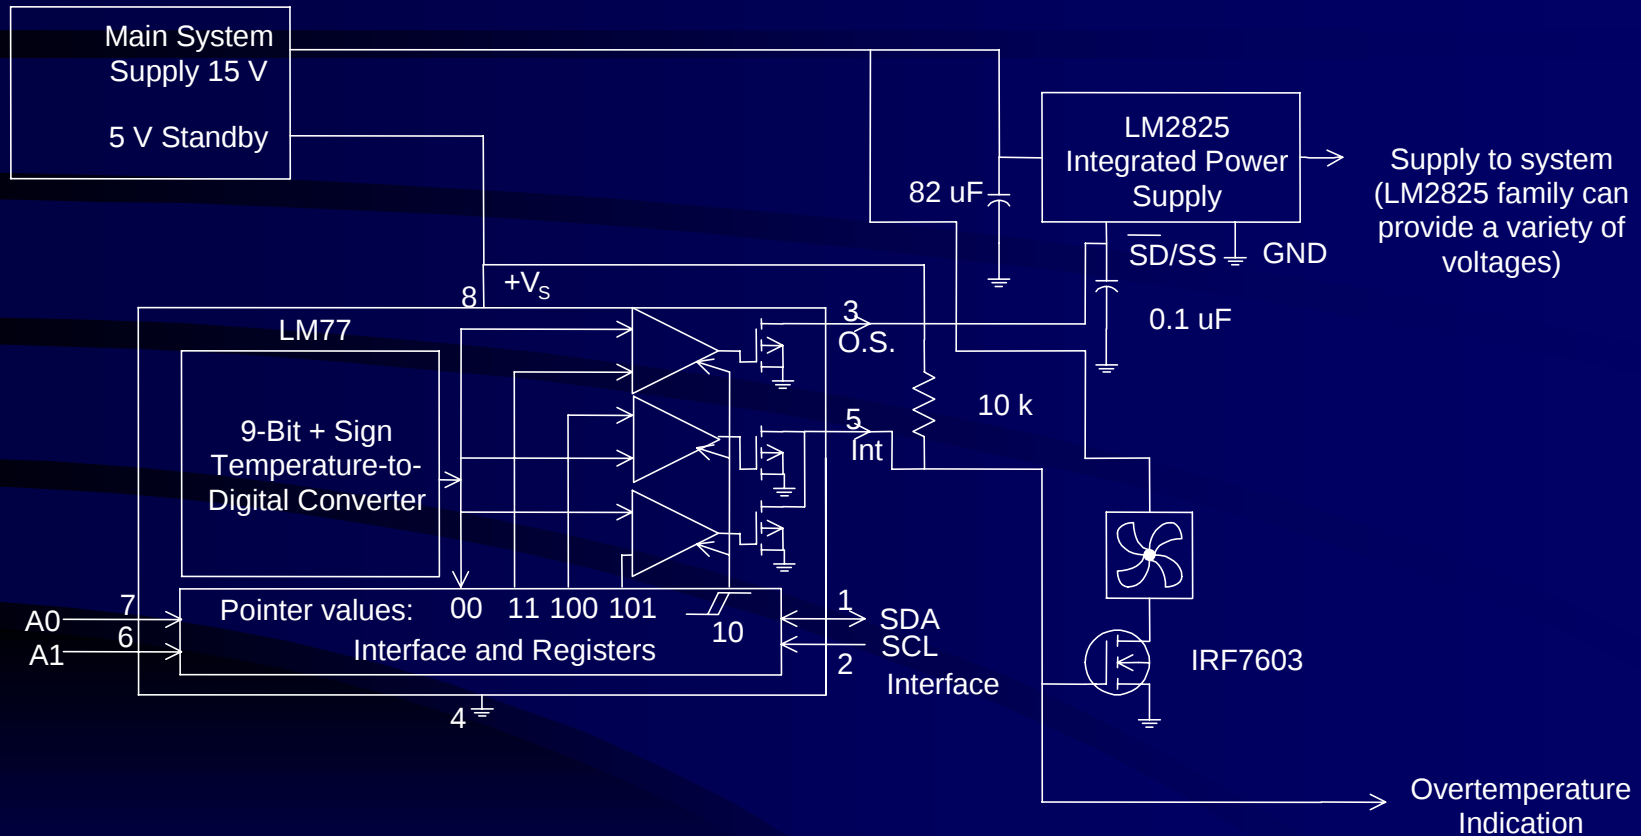


Temperature Sensing, Voltage Monitoring, and Fan Monitoring: Heceta II Block Diagram

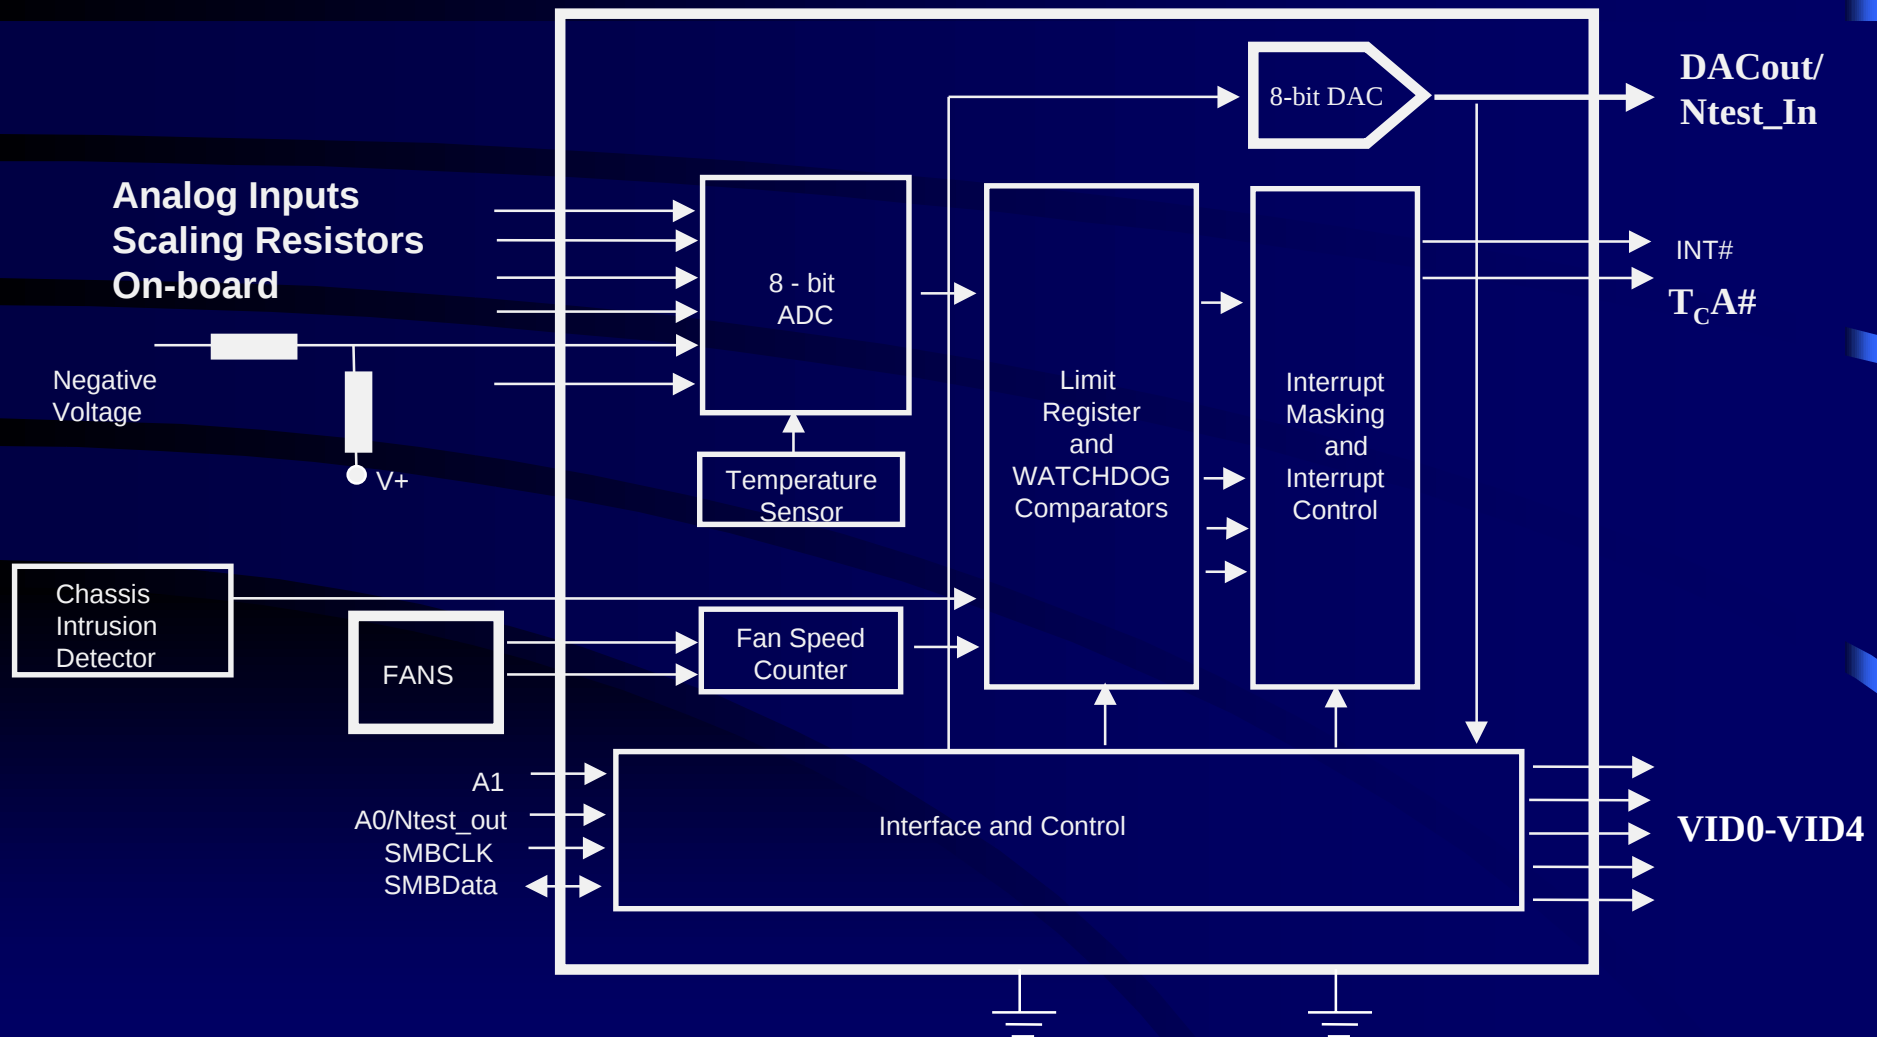


LM81: Three Comparators, Two Outputs

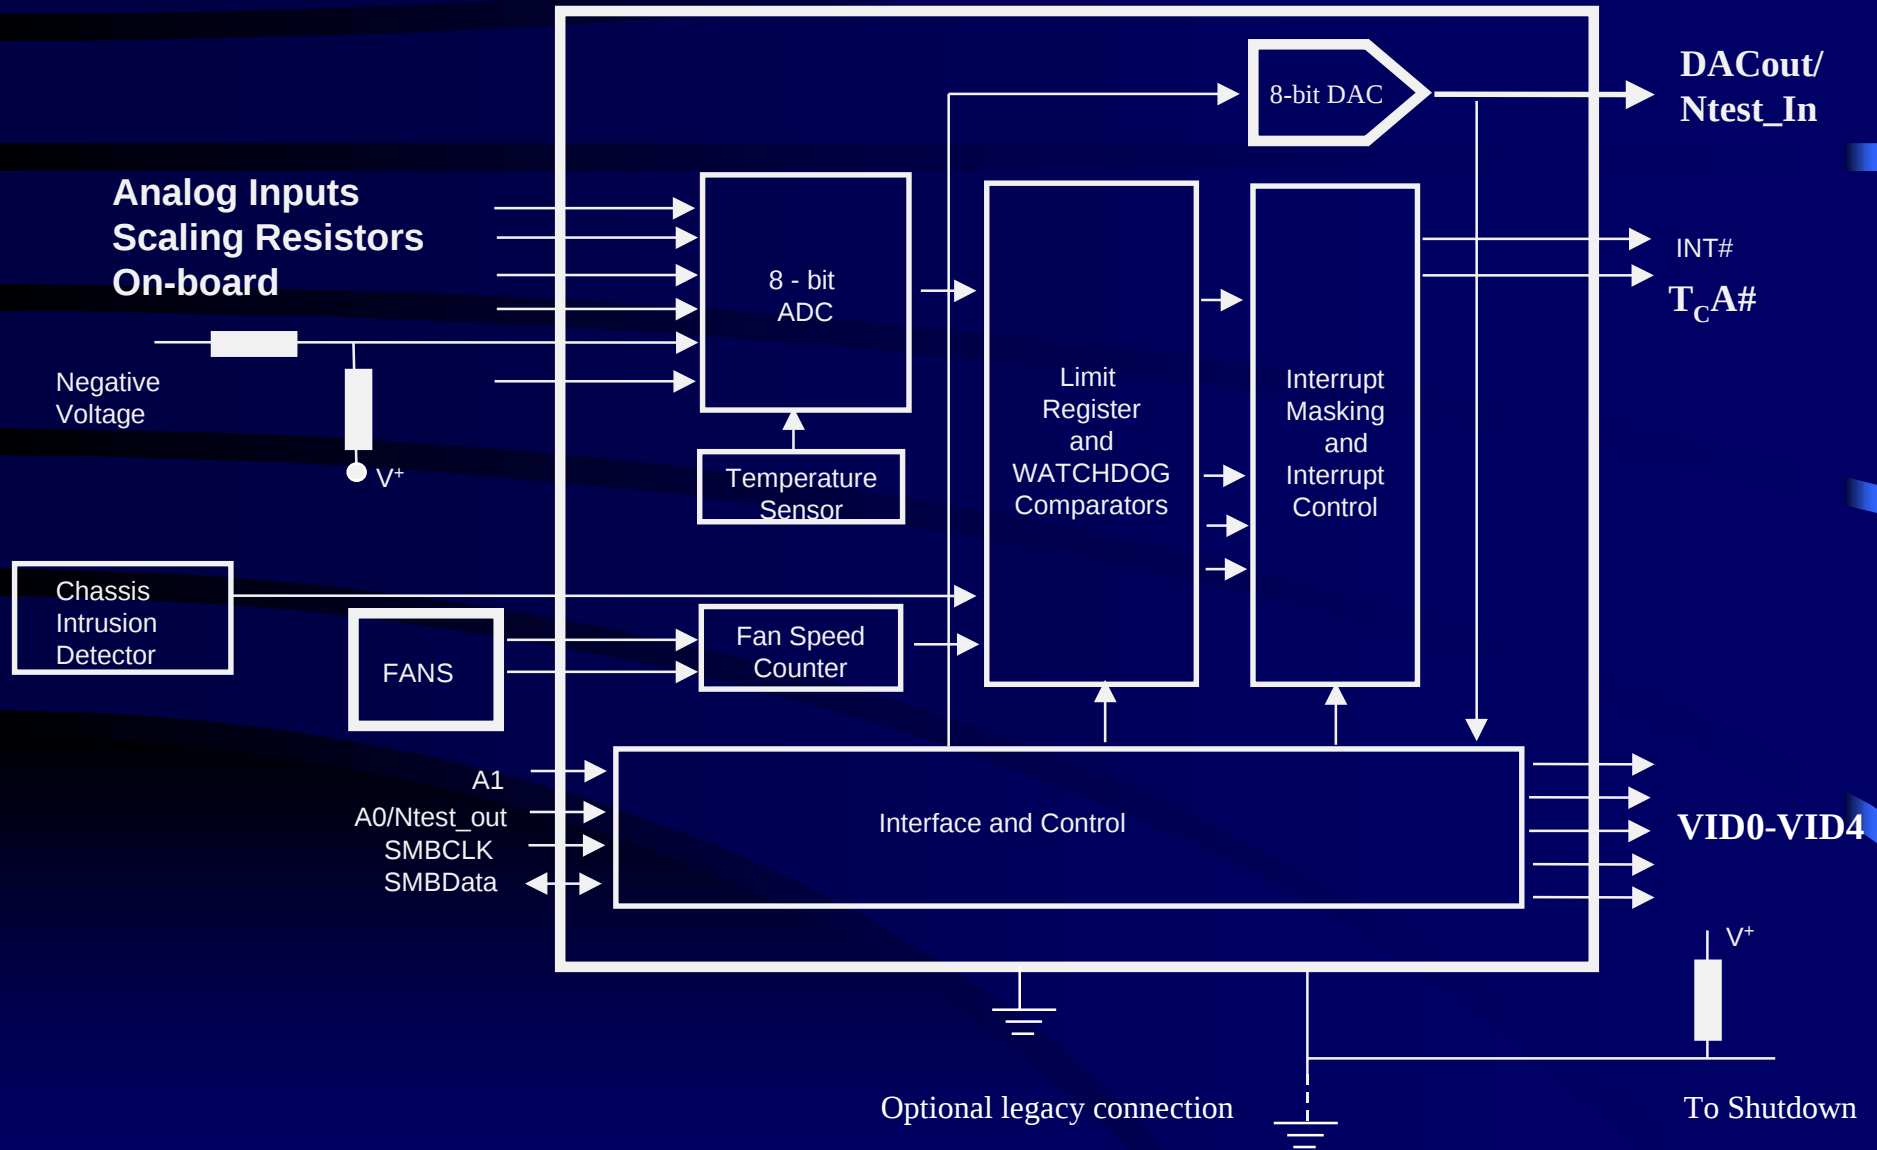

Fan Control With the LM81's DAC

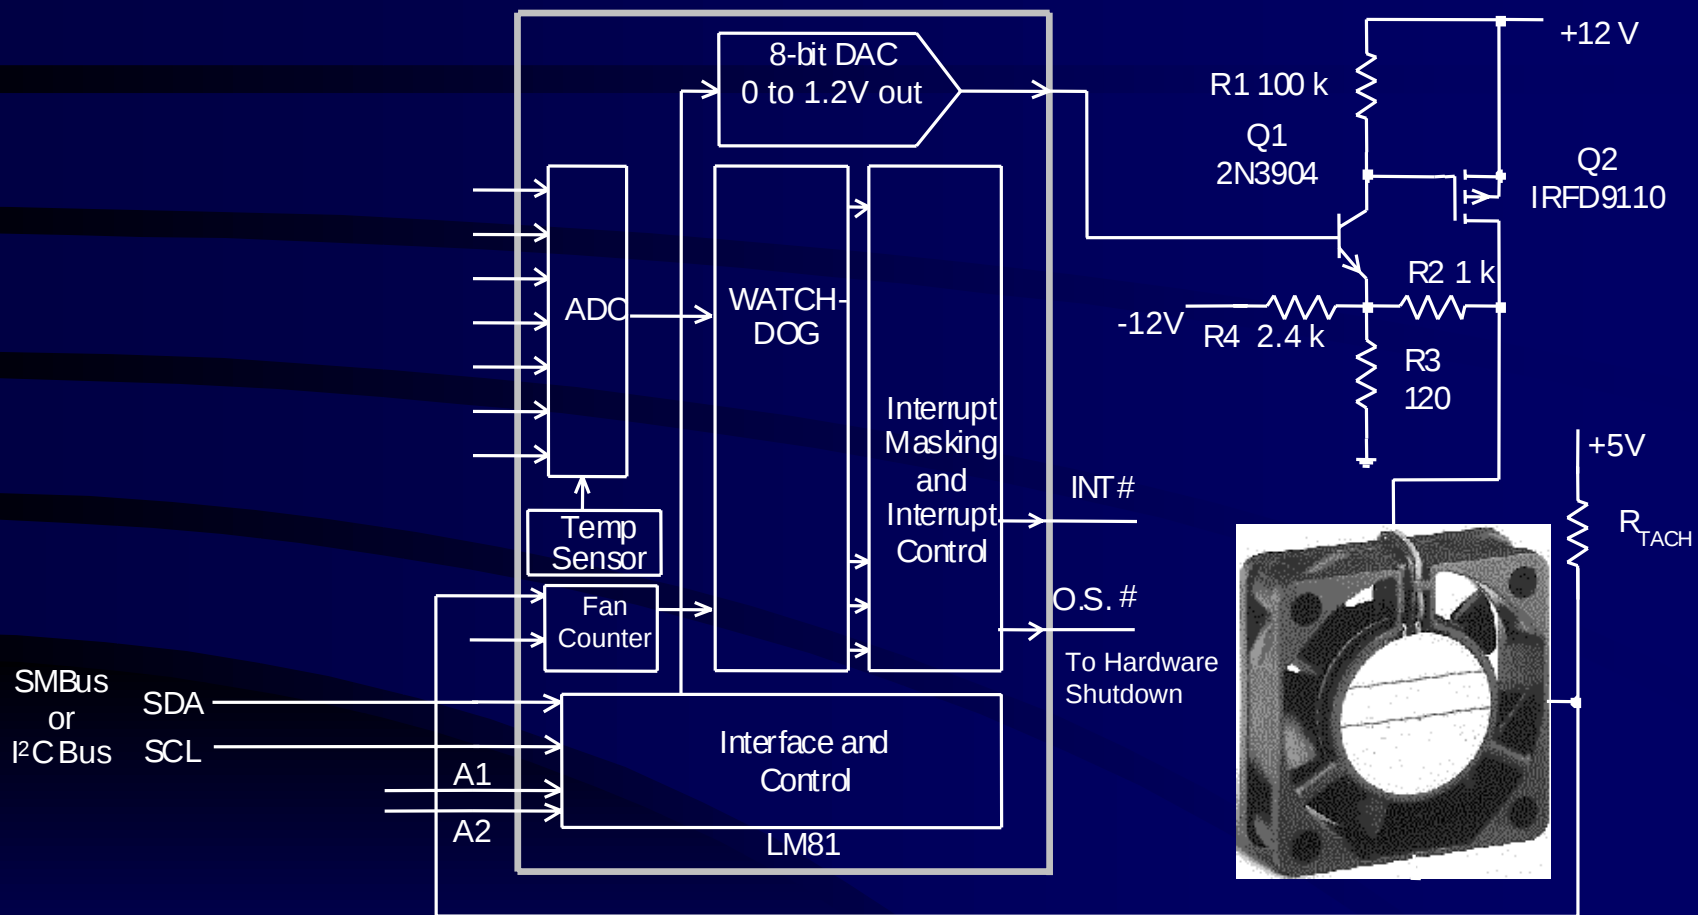

Multiple Sensors on the Parallel Printer Port

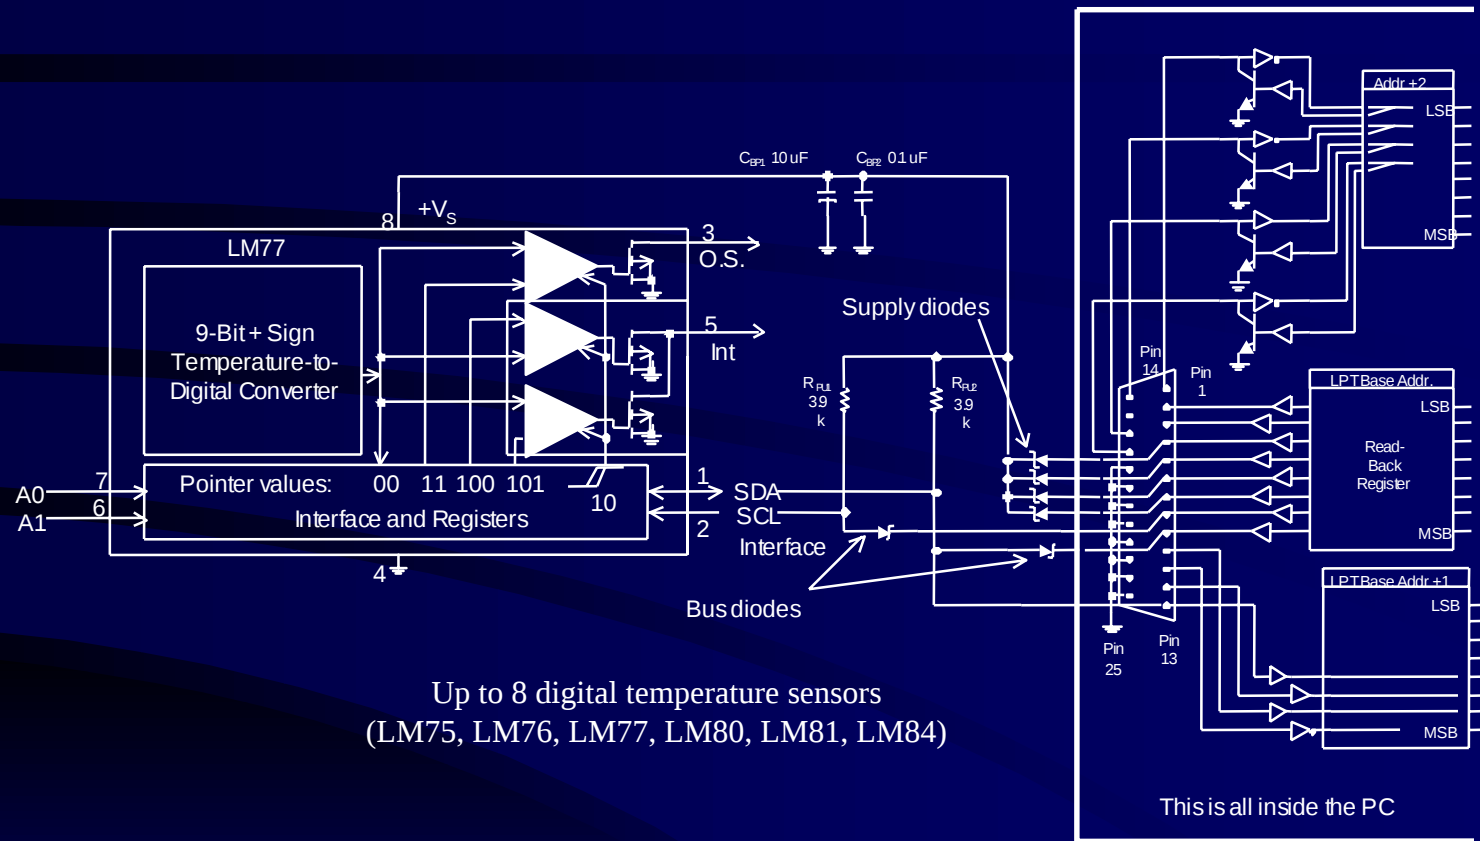


64 Temperatures via I²C

Linear sensors:

LM20: SC-70, -11.7mV/deg C


LM35, LM45, LM50, LM60: 10mV/deg C

LM62: 16mV/deg C

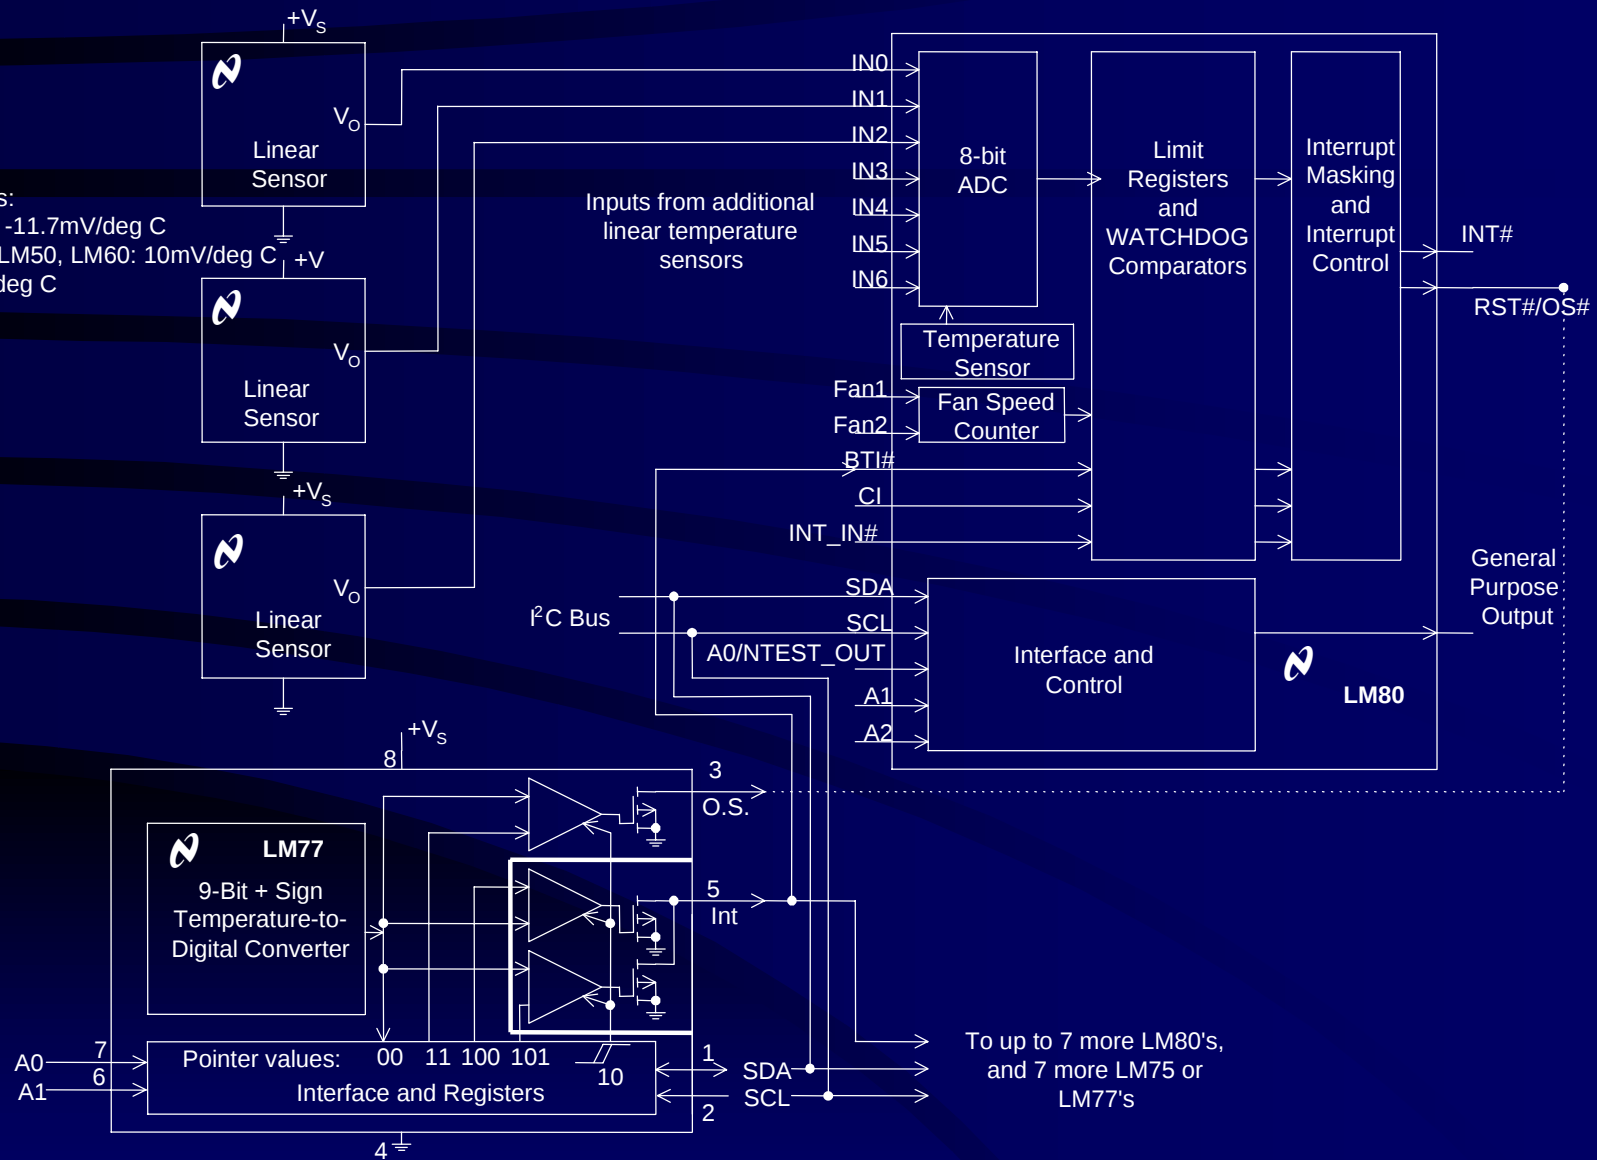


To up to 7 more LM80's,
and 7 more LM75 or
LM77's


LM80 Data Acquisition: Instrument Health Monitor

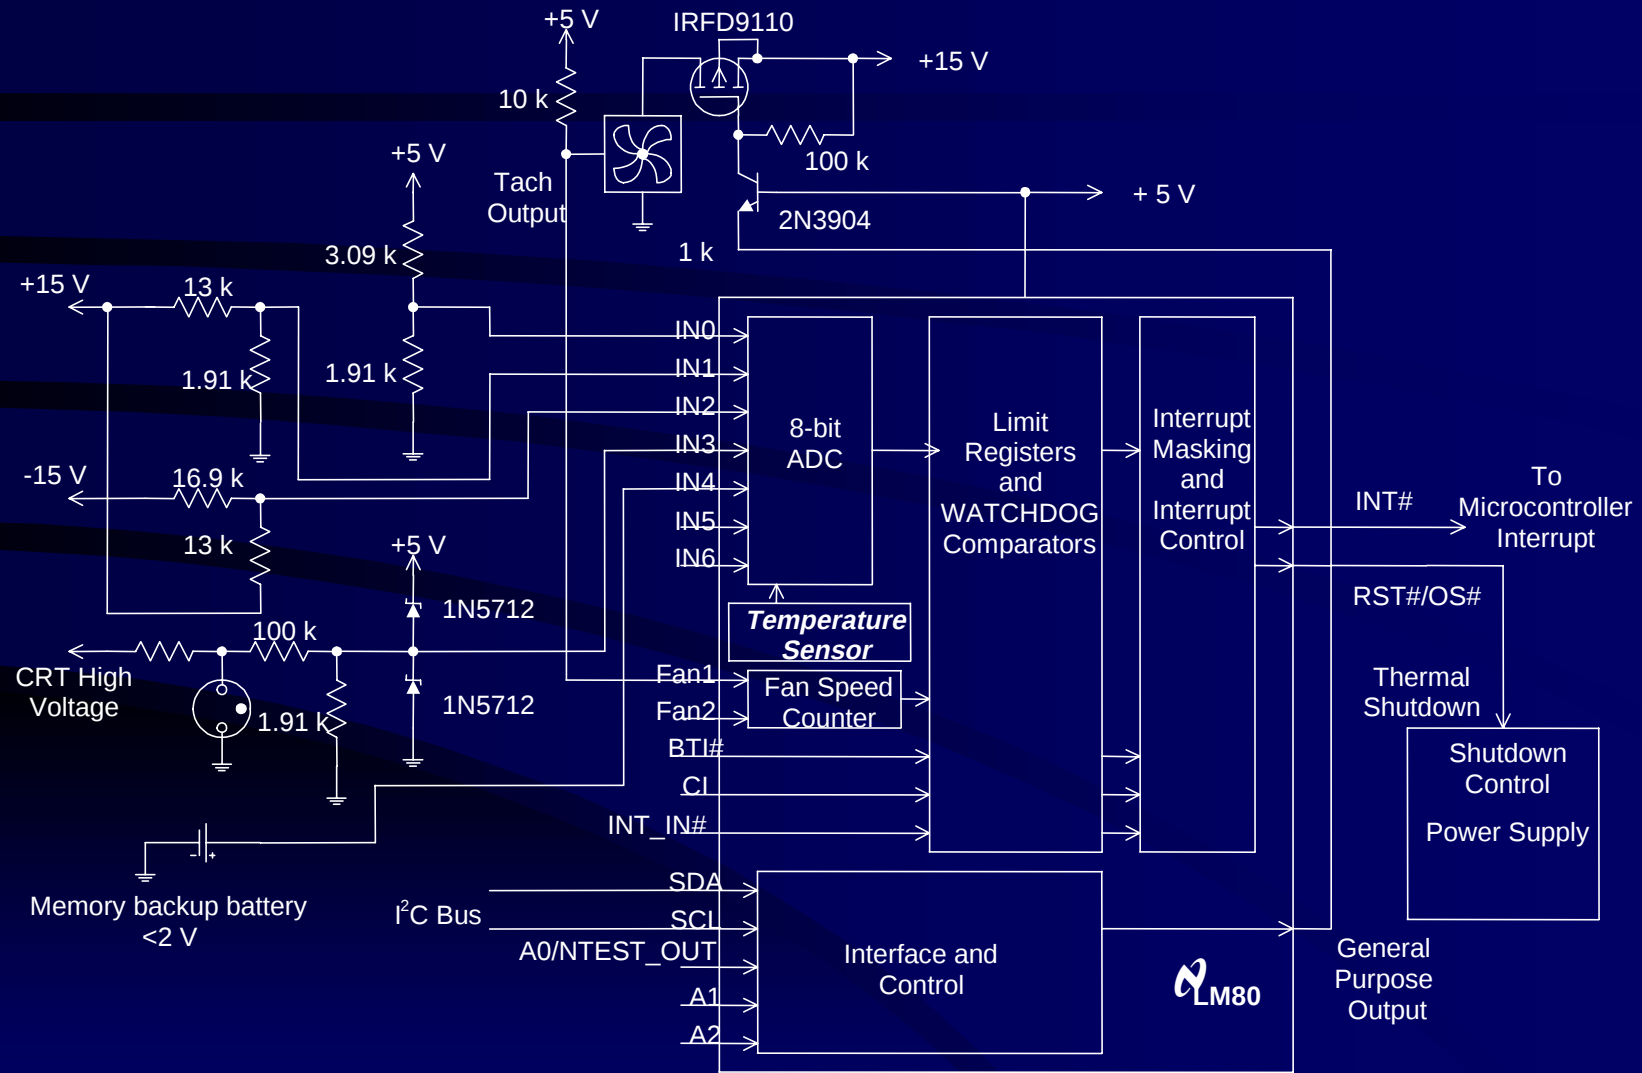



Sensing Temperature of an External PN Junction

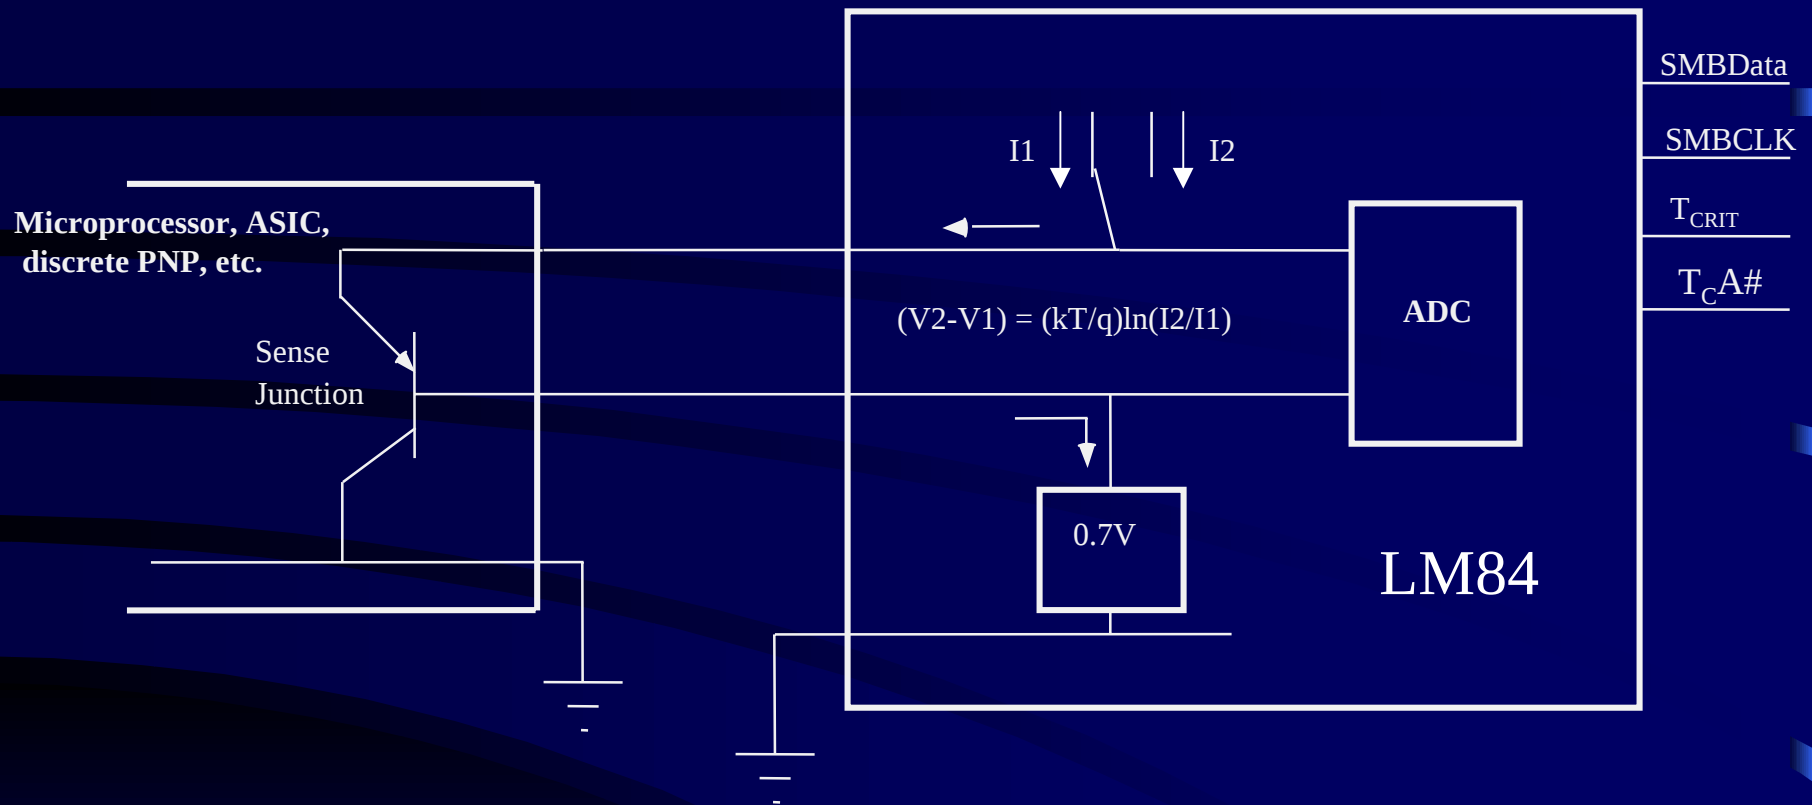

LM84 Block Diagram

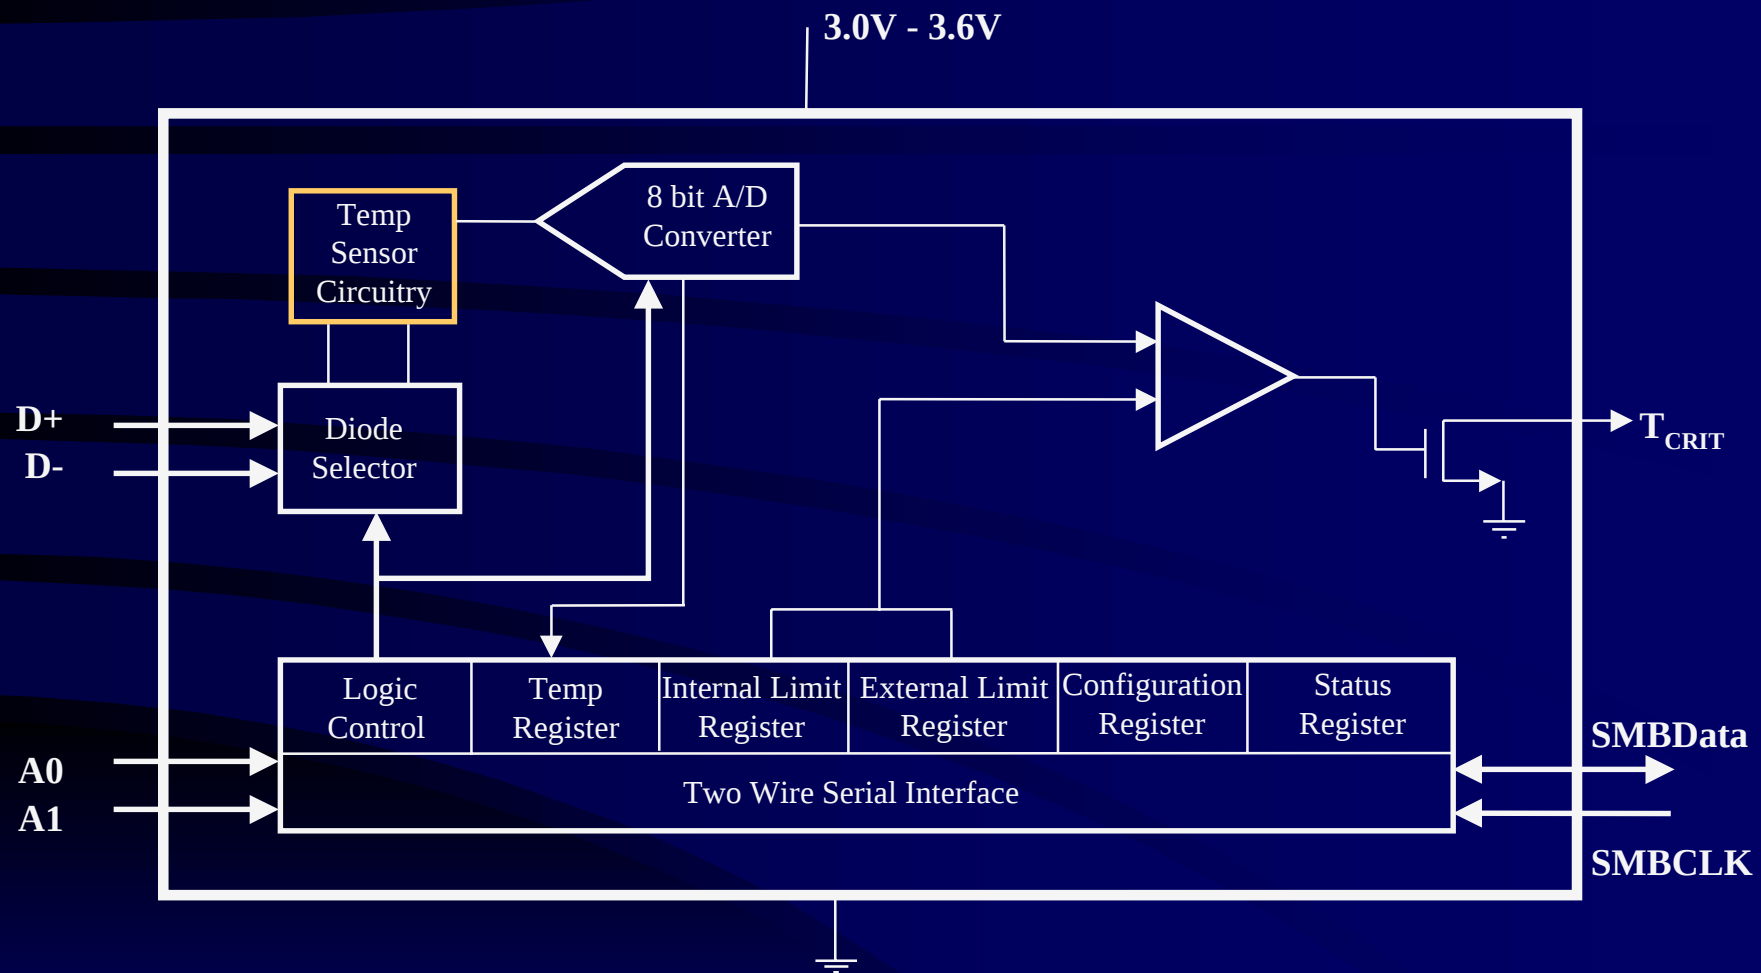

Measuring Heat Sink Temperature

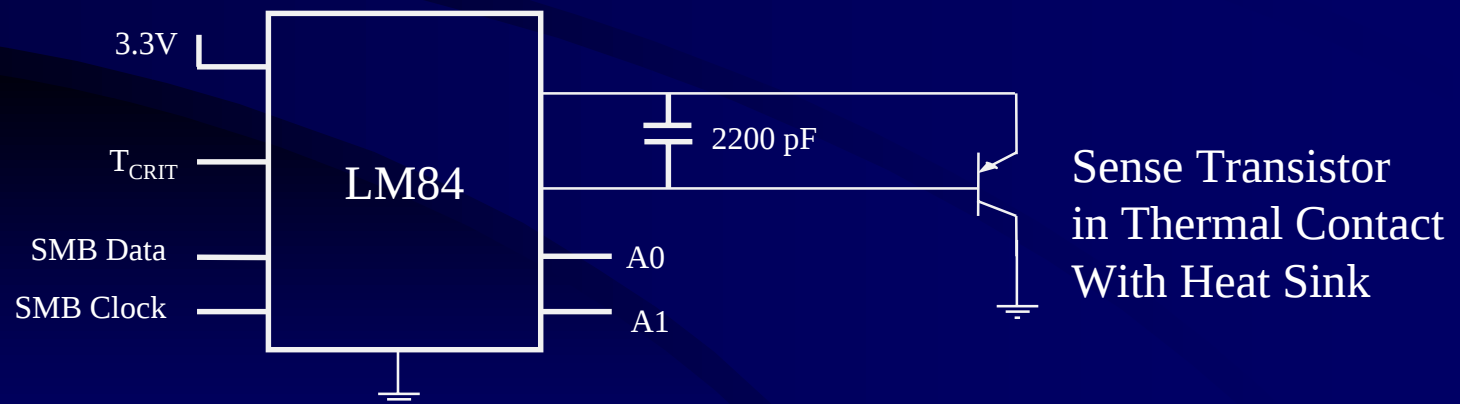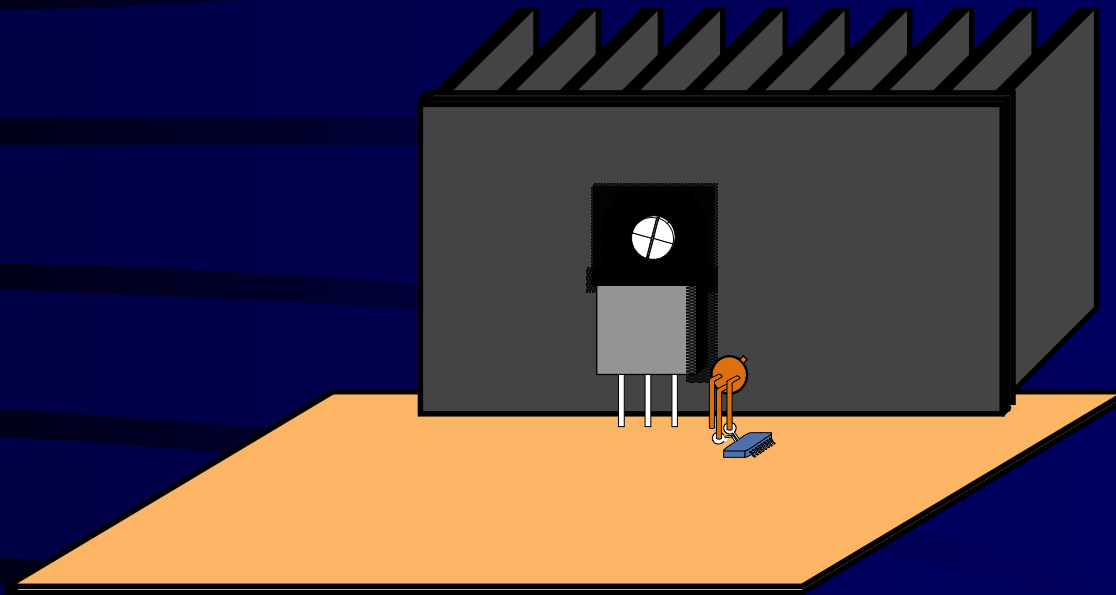

Accuracy Matters!

If your sensor is inaccurate:

- Your system is too noisy.

- Your system is too slow.

- Your system shuts down when it doesn't need to.

Things to check:

- Accuracy/stability with your power supply (supply noise)

- Accuracy/stability with system operating (noisy signals)


Keys to success:

- Avoid noise - Use supply bypass, minimize sense traces.

- Use sensors with low noise sensitivity.

I²C vs SMB

I²C

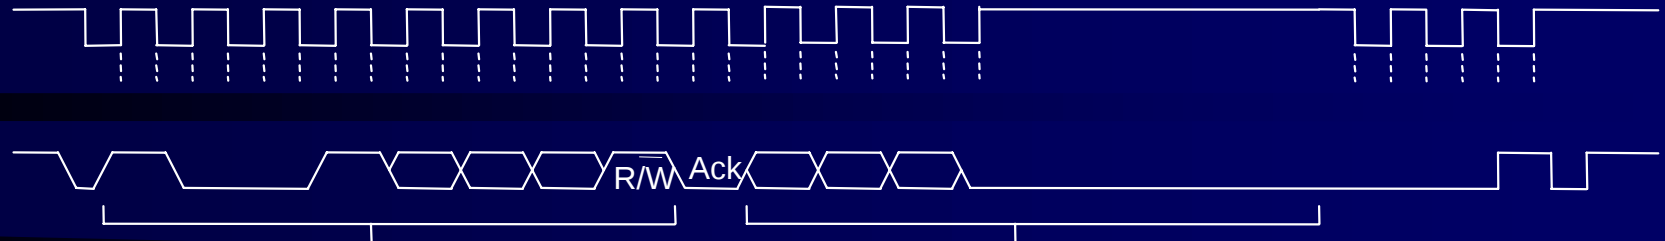


Start

Address Byte

Read Data Byte, Master forgets to finish, SDA is Held low by slave.

Master can recover by clocking until SDA high, then Start & Stop. Some masters (PIIX4) can't do this.

SMBus

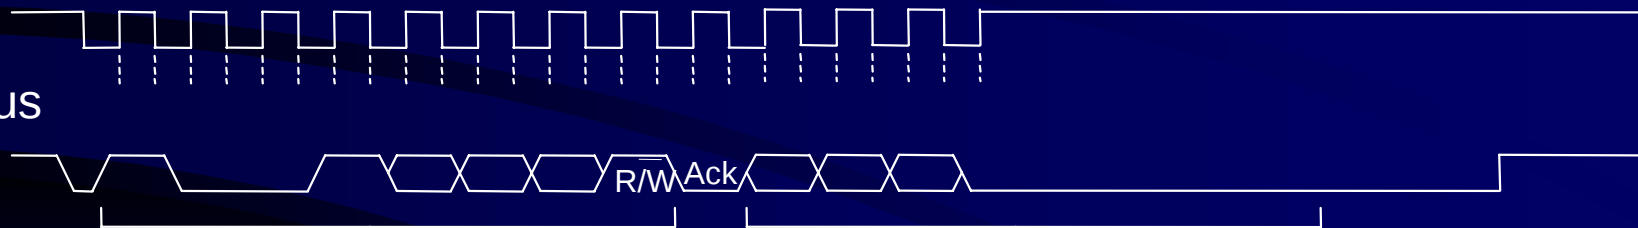

Start


Address Byte

Read Data Byte, Master forgets to finish, SDA is Held low by slave.


Slave releases SDA after 25 mSec. and returns to initialized state without intervention by Master

SMB timeout prevents slave from locking up bus.

LM74 Read and Write Connection for SPI and MICROWIRE™

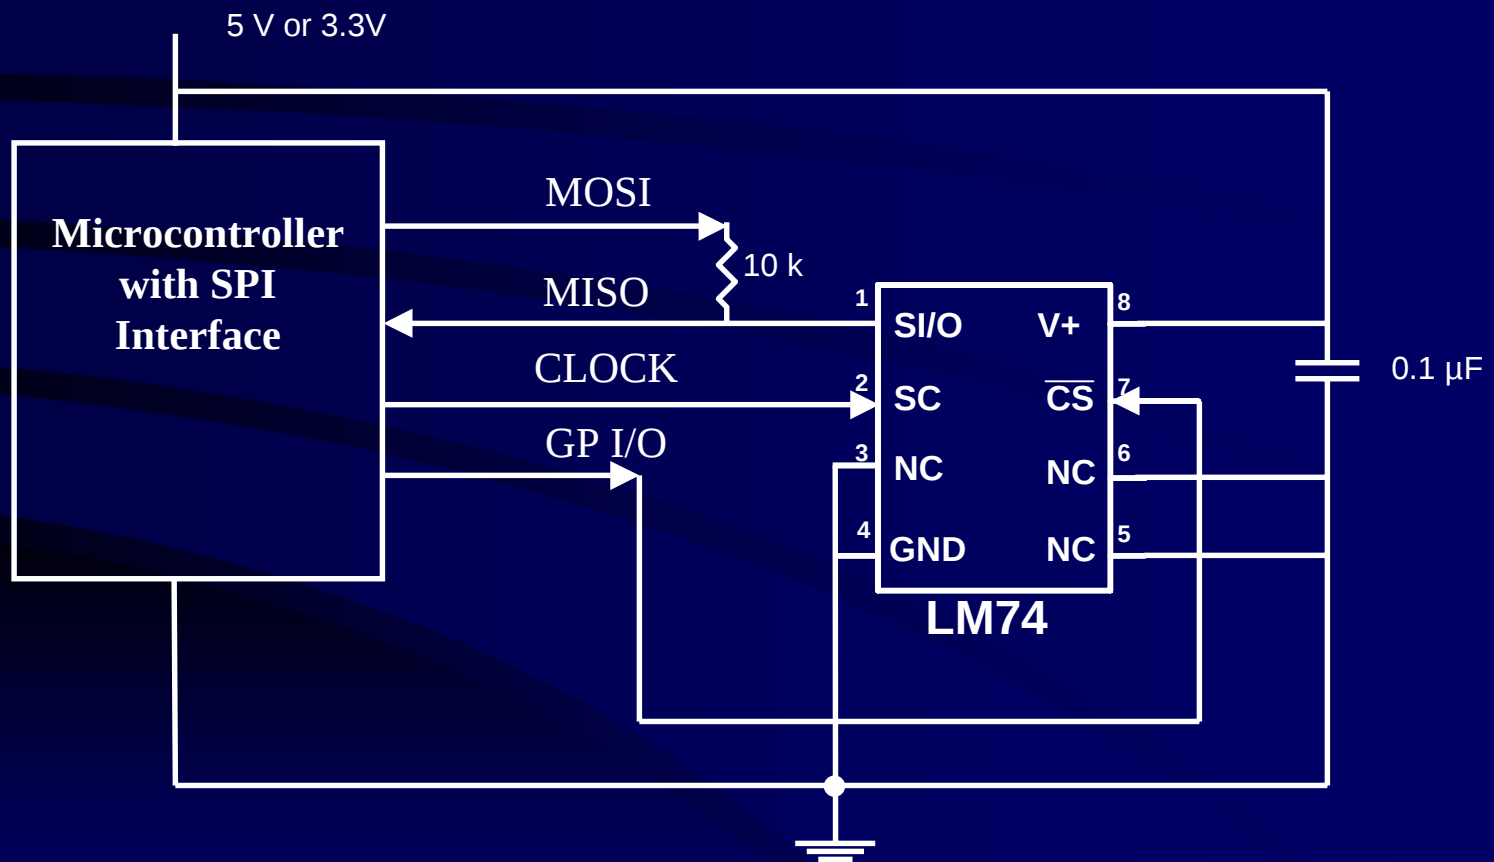


SPI/MICROWIRE Compatible Interface

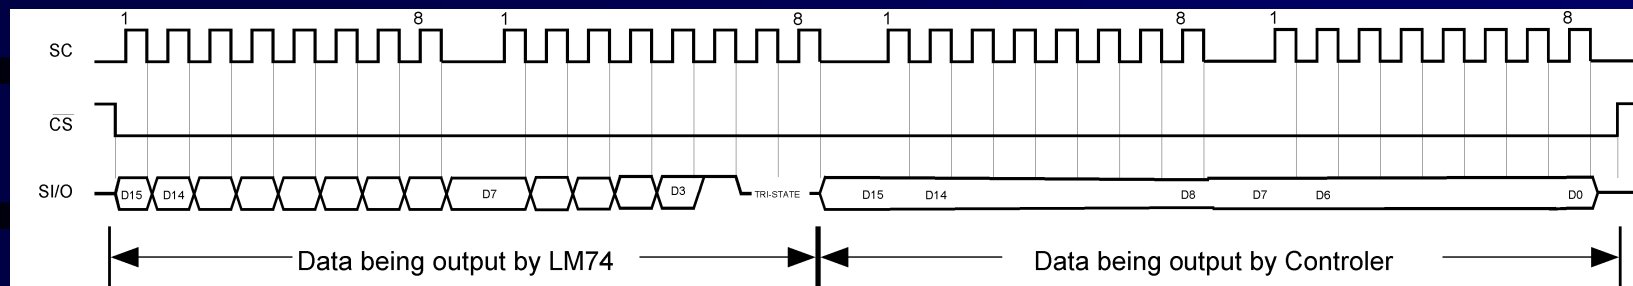


- Identification is the first word transmitted after power up
- Can place the part in shutdown to lower power consumption
- When in shutdown identification is transmitted, not temperature data

Increase Disk Drive Reliability With Temperature Monitoring

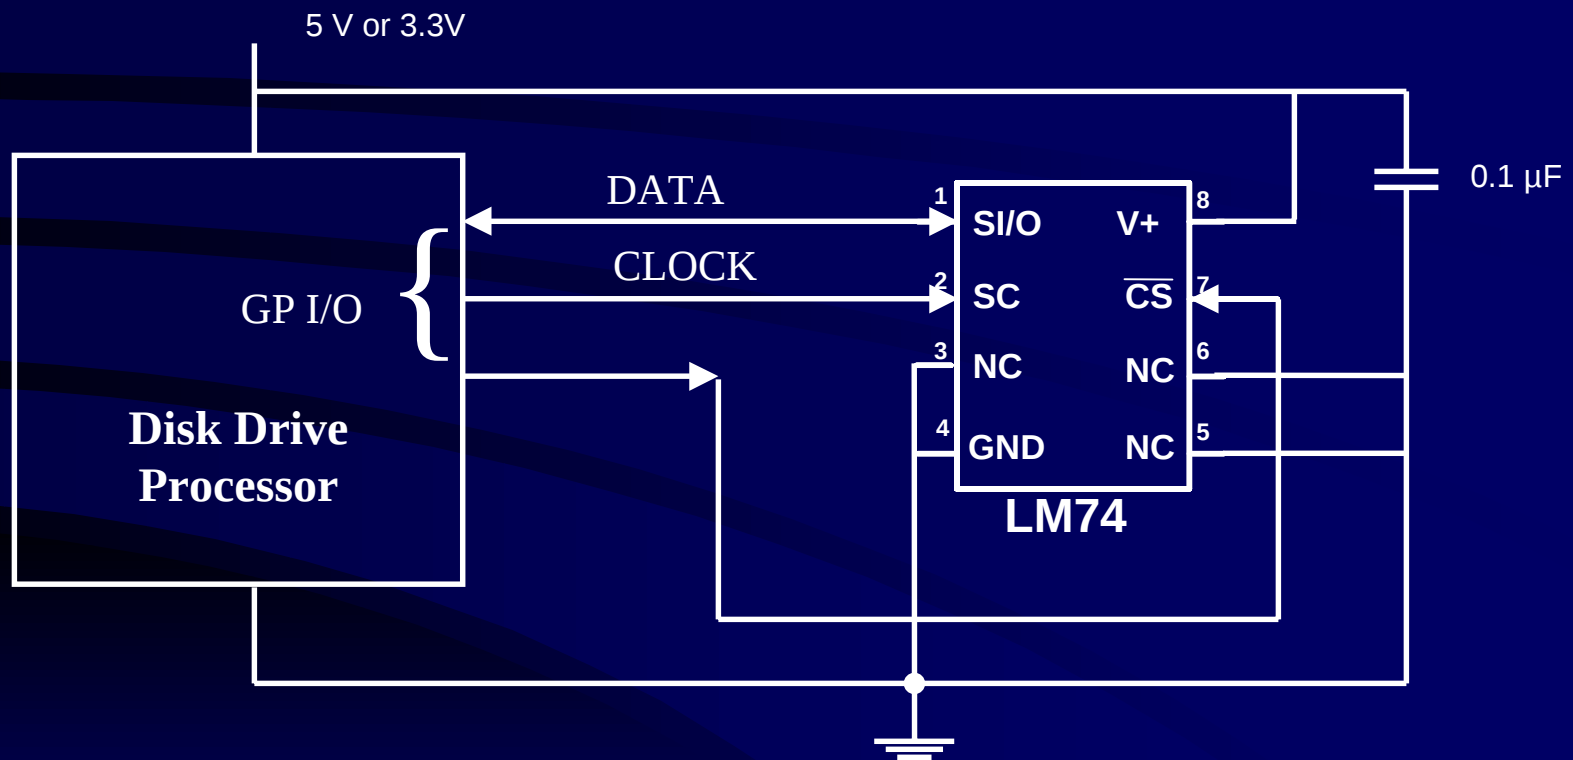

LM77 in LM74 Socket

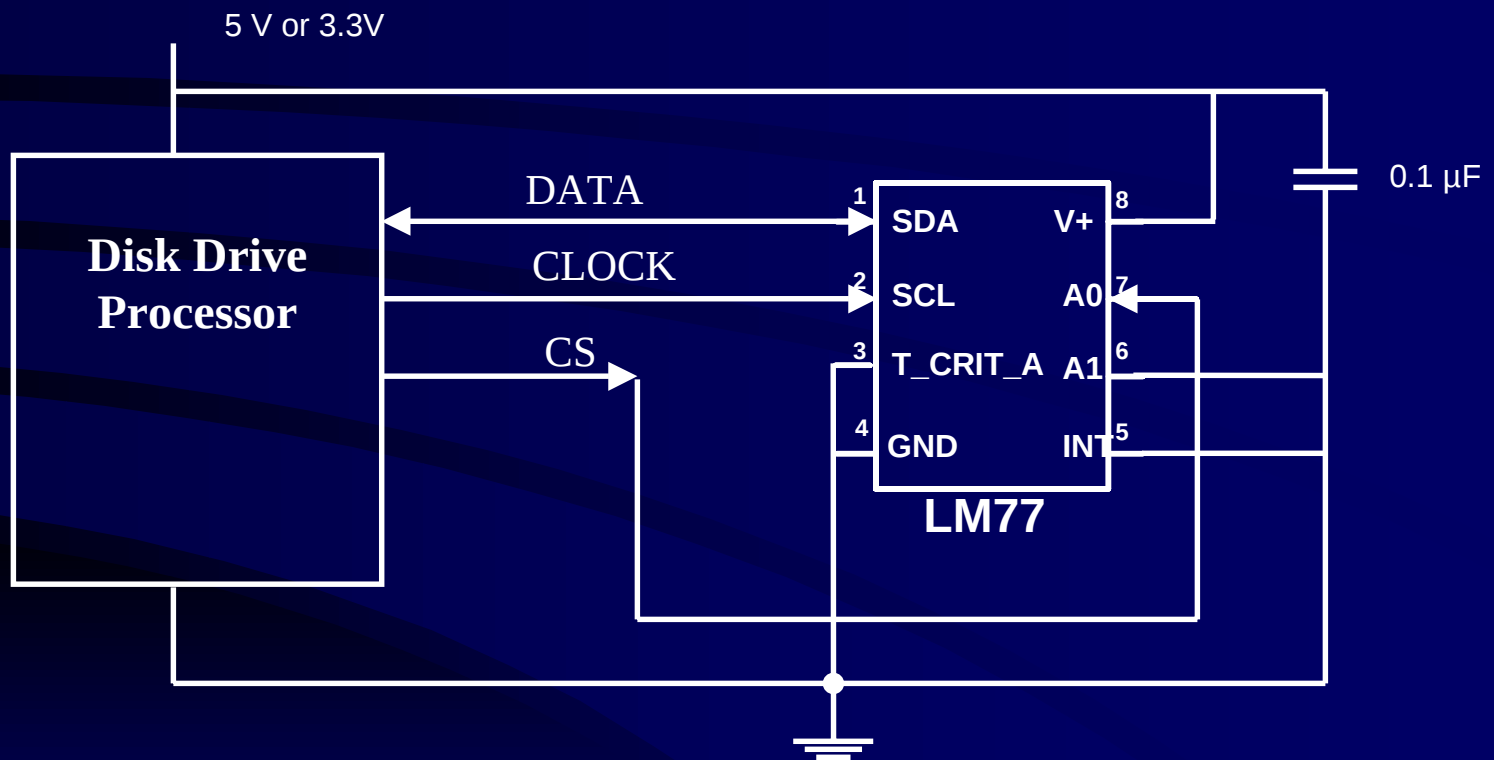

Temperature Sensor Selection Guide

Product	Product Description	Operating Temp. Range	Accuracy	Sensor Gain	Supply Voltage Range	Quiescent Current
ANALOG OUTPUT						
LM20B	SC-70 Precision Celsius Temperature Sensors	-55 °C to +125 °F	±2.5 °C	-11 mV/°C	+2.4 V to +5.5 V	7 μA
LM20C		-55 °C to +125 °F	±5.0 °C	-11 mV/°C	+2.4 V to +5.5 V	7 μA
LM34A	Precision Fahrenheit Temperature Sensors	-50 °F to +300 °F	±2.0 °F	10 mV/°F	+5 V to +30 V	163 μA
LM34		-50 °F to +300 °F	±3.0 °F	10 mV/°F	+5 V to +30 V	181 μA
LM34CA		-40 °F to +230 °F	±3.0 °F	10 mV/°F	+5 V to +30 V	142 μA
LM34C		-40 °F to +230 °F	±3.0 °F	10 mV/°F	+5 V to +30 V	159 μA
LM34D		-32 °F to +212 °F	±4.0 °F	10 mV/°F	+5 V to +30 V	159 μA
LM35A	Precision Celsius Temperature Sensors	-55 °C to +150 °C	±1.0 °C	10 mV/°C	+4 V to +30 V	133 μA
LM35		-55 °C to +150 °C	±1.5 °C	10 mV/°C	+4 V to +30 V	161 μA
LM35CA		-40 °C to +110 °C	±1.5 °C	10 mV/°C	+4 V to +30 V	116 μA
LM35C		-40 °C to +110 °C	±2.0 °C	10 mV/°C	+4 V to +30 V	141 μA
LM35D		0 °C to +100 °C	±2.0 °C	10 mV/°C	+4 V to +30 V	141 μA
LM45B	SOT-23, Celsius Temperature Sensors	-20 °C to +100 °C	±3.0 °C	10 mV/°C	+4 V to +10 V	160 μA
LM45C		-40 °C to +125 °C	±4 °C	10 mV/°C	+4 V to +10 V	160 μA
LM50B	SOT-23, Single Supply, Celsius Temperature Sensors	-20 °C to +100 °C	±3.0 °C	10 mV/°C	+4.5 V to +10 V	180μA
LM50C		-40 °C to +125 °C	±4.0 °C	10 mV/°C	+4.5 V to +10 V	180 μA
LM60B	2.7 V, SOT-23, Single Supply Celsius Temperature Sensors	-25 °C to +85 °C	±3.0 °C	6.25 mV/°C	+2.7 V to +10 V	125 μA
LM60C		-40 °C to +125 °C	±4.0 °C	6.25 mV/°C	+2.7 V to +10 V	125 μA
LM61B		-25 °C to +125 °C	±3.0 °C	10 mV/°C	+2.7 V to +10 V	140 μA
LM61C		-40 °C to +125 °C	±4.0 °C	10 mV/°C	+2.7 V to +10 V	140 μA
LM62B		-20 °C to +85 °C	±3.0 °C	15 mV/°C	+2.7 V to +10 V	180 μA
LM62C		-20 °C to +85 °C	±4.0 °C	15 mV/°C	+2.7 V to +10 V	180 μA
DIGITAL OUTPUT						
LM56B	Low Power Thermostats	-40 °C to +125 °C	±3.0 °C	6.2 mV/°C	+2.7 V to +10 V	230 μA
LM56C		-40 °C to +125 °C	±4.0 °C	6.2 mV/°C	+2.7 V to +10 V	230 μA
LM74	SPI/MICROWIRE Temperature Sensor	-40 °C to +125 °C	±1.25 °C	0.0625 °C/LSB	+3.0 V to +5.5 V	1 mA
LM75	I2C Temperature Sensor	-40 °C to +125 °C	±3.0 °C	0.5 °C/LSB	+3.0 V to +5.5 V	1 mA
LM76	12-bit Plus Sign I2C Temperature Sensor	-40 °C to +125 °C	±1.5 °C	0.0625 °C/LSB	+3.0 V to +5.5 V	1 mA
LM77	I2C ACPI Temperature Sensor	-40 °C to +125 °C	±1.5 °C	0.5 °C/LSB	+3.0 V to +5.5 V	1 mA
LM84	SMBus Remote Diode Temperature Sensor	-40 °C to +125 °C	±2.0 °C	1 °C/LSB	+3.0 V to +5.5 V	1 mA
SYSTEM HARDWARE MONITORS						
LM78	ISA Bus / I2C Bus System Hardware Monitors	-40 °C to +125 °C	±3.0 °C	1 °C/LSB	+4.25 V to +5.75 V	1 mA
LM79		-40 °C to +125 °C	±3.0 °C	1 °C/LSB	+4.25 V to +5.75 V	2 mA
LM80	I2C System Hardware Monitor	-20 °C to +125 °C	±3.0 °C	0.0625 °C/LSB	+3.0 V to +5.5 V	2 mA
LM81	SMBus System Hardware Monitor (D/A Output)	-30 °C to +125 °C	±3.0 °C	0.0625 °C/LSB	+2.8 V to +3.8 V	2 mA

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated