



Detection Voltage Selection Guidelines for Application of NCP30X Family Series

APPLICATION NOTE

Device	Application	Input Voltage	Output Power	Topology	I/O Isolation
NCP30X	Voltage Supervisory Rest IC	N/A	N/A	N/A	N/A

Circuit Description

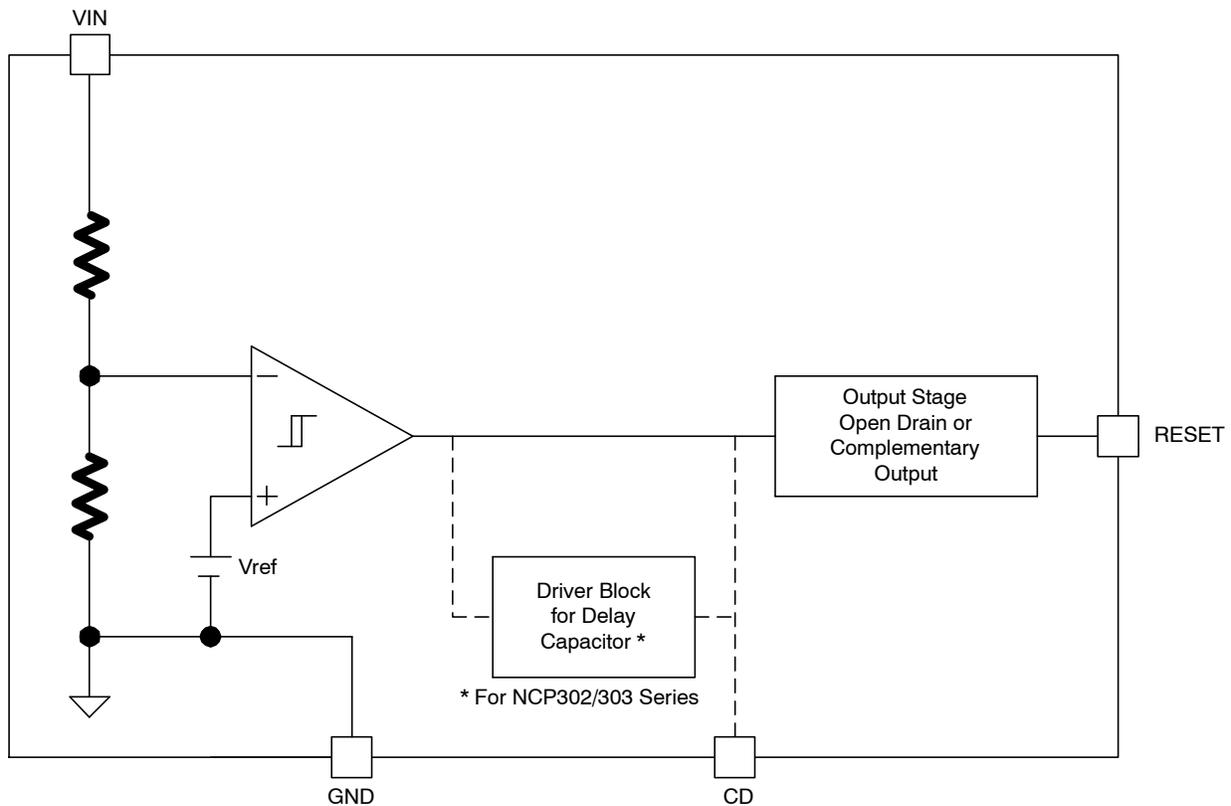


Figure 1. General Block Diagram of NCP30X Family Series

The Figure 1 shows the basic block diagram of NCP30X supervisory family series. It features a highly accurate undervoltage detector with hysteresis. Some parts also feature an externally programmable time delay generator by adding a delay capacitor at the CD pin. This combination of features prevents the system from erratic reset operation.

AND8425/D

To guarantee the microprocessor (uP) operating normally, the power supply should be well monitored by using voltage monitor device such as NCP30X. In order to make sure that the uP RESET input is asserted when the power supply is not ready and, RESET pin is de-asserted for normal operation when power supply voltage reaches above the minimum operating range of V_{CC} input.

This document demonstrates the guideline how to select NCP30X detection voltage option based on the given system parameters.

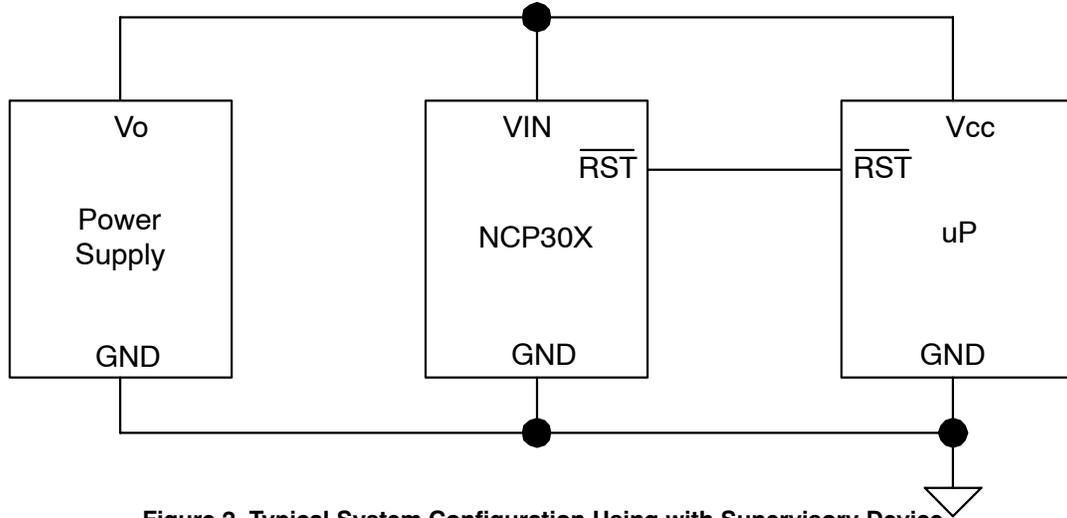


Figure 2. Typical System Configuration Using with Supervisory Device

The configuration in the Figure 2 shows how the power supply connects to uP under the voltage monitoring by NCP30X device. To make sure that uP is in normal operation, typically the voltage % tolerance of the power supply must be tighter than that of the uP. For example, if the uP's V_{CC} voltage tolerance (it can be found in uP's DC electrical specification at data sheet) is $\pm 5\%$, then the power supply % tolerance should be less than 5%, say, for example 3%.

NCP30X Detection Voltage Selection Criteria

For selecting the NCP30X detection voltage option, basically there are three major factors to be considered:

1. $V_{DET+_{max}}$ = Maximum detection voltage (V_{in} rises) of the NCP30X.
2. $V_{in_{min}}$ = Minimum voltage output of the power supply.
3. $V_{CC_{min}}$ = Minimum voltage input of the device (powered by supply V_{in}) that can normally operate.

For the $V_{DET+_{max}}$, it can be given by the following formula:

$$V_{DET+_{max}} = V_{DET-_{max}} + V_{HYS_{max}} \quad (\text{eq. 1})$$

Where:

$V_{DET-_{max}}$ = Maximum detector threshold voltages

$V_{HYS_{max}}$ = Maximum detector threshold hysteresis

For the NCP30X family, for given $V_{DET-_{typ}}$ typical detection voltage which reflects on the part number at data sheet, the device's threshold values are designed to the following targets (at 25°C).

$$V_{DET-_{min}} = V_{DET-_{typ}} - 2\% \quad (\text{eq. 2})$$

$$V_{DET-_{max}} = V_{DET-_{typ}} + 2\% \quad (\text{eq. 3})$$

$$V_{HYS_{typ}} = 5\% \text{ of } V_{DET-_{typ}} \quad (\text{eq. 4})$$

$$V_{HYS_{min}} = V_{HYS_{typ}} - 40\% \quad (\text{eq. 5})$$

$$V_{HYS_{max}} = V_{HYS_{typ}} + 40\% \quad (\text{eq. 6})$$

The below table shows how those information can be found in the data sheet:

NCP300 Series	Detector Threshold			Detector Threshold Hysteresis		
	V_{DET-} (V) (Note 4)			V_{HYS} (V)		
	Min	Typ	Max	Min	Typ	Max
NCP300LSN09T1	0.882	0.9	0.918	0.027	0.045	0.063
NCP300I SN18T1	1.764	1.8	1.836	0.054	0.090	0.126

By simple mathematical re-combination of Equations 2 to 6, Equation 1 becomes:

$$V_{DET+_{max}} = V_{DET-_{typ}} \times 1.09$$

So, $V_{DET+_{max}}$ can be easily figure out by just using a single variable $V_{DET-_{typ}}$.

For having the value of $V_{DET+_{max}}$, the NCP30X device detection voltage option must be chosen such that:

$$V_{CC_{min}} < V_{DET+_{max}} < V_{in_{min}}$$

The physical meaning of $V_{CC_{min}} < V_{DET+_{max}}$ is that it makes sure the reset from NCP30X is asserted (in RESET hold state) before V_{in} supply becomes higher than $V_{CC_{min}}$ for prevention from incorrect device (uP) initialization.

For the $V_{DET+_{max}} < V_{in_{min}}$, it makes sure the NCP30X is able to start up even though V_{in} is at the $V_{in_{min}}$.


Theoretically speaking, by principle of two points averaging, the ideal detection voltage threshold value, $V_{DET-_{typ_{ideal}}}$, can be given by the following formula:

$$V_{DET-_{typ_{ideal}}} = (V_{in_{min}} + V_{CC_{min}}) / (2 \times 1.09)$$

AND8425/D

Example of Detection Voltage Threshold Selection Calculation

1. Power supply output specification: $3.3\text{ V} \pm 3\%$
2. Microprocessor core voltage specification: $3.3\text{ V} \pm 5\%$

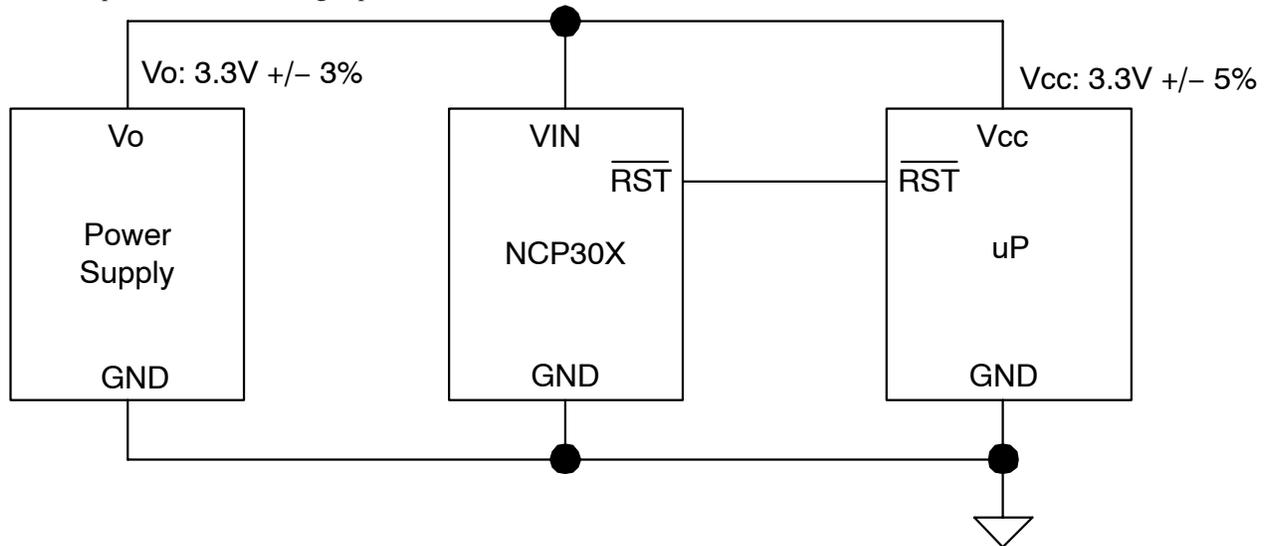

So, we have:

$$\begin{aligned} V_{in_min} &= 3.3\text{ V} * 0.97 \\ &= 3.201\text{ V} \\ V_{CC_min} &= 3.3\text{ V} * 0.95 \\ &= 3.135\text{ V} \end{aligned}$$

Recall the formula

$$V_{DET_typ_ideal} = (V_{in_min} + V_{CC_min}) / (2 * 1.09)$$

$$\begin{aligned} \text{So, the ideal detection voltage option} &= (3.201 + 3.135) / (2 * 1.09) \\ &= 2.9064\text{ V} \end{aligned}$$

Therefore, the device detection voltage option 2.9 V should be the right choice. That is to say, customer should select the part number NCP30xxSx29T1G.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local Sales Representative