

Implementing High Power Notebook Adapter Evaluation Board User's Manual

High Power Notebook Adapter with the NCP1399, NCP1602, NCP4305, NCP4354 and NCP4810



ON Semiconductor®

www.onsemi.com

Eval Board User's Manual

Table 1. GENERAL PARAMETERS

Devices	Applications	Input Voltage	Output Power	Topology	Board Size
NCP1399 NCP1602 NCP4305 NCP4354 NCP4810	High Power NB Adapter	85 – 260 V _{AC}	150 W	CRM PFC & LLC	142 × 67.5 × 19.5 mm 13.16 W/inch ³
Output Voltage	V _{OUT} Ripple	Efficiency	Operating Temperature	Cooling	Standby Power
19.5 V/7.7 A (9 A Curr. Limit)	< 150 mV 3 to 7 A Load Steps	Above 91% @ I _{LOAD} > 2 A	0–50°C	Convection Open Frame	< 130 mW

Description

This evaluation board user's manual provides elementary information about a high efficiency, low no-load power consumption reference design that is targeting power laptop adapter or similar type of equipment that accepts 19.5 V_{DC} on the input.

The power supply implements PFC front stage to assure unity power factor and low THD, current mode LLC power stage to enhance transient response and secondary side synchronous rectification to maximize efficiency. This design focuses mainly on the NCP1399 current mode LLC controller description – please refer to NCP1602 and NCP4305 material to gain more information about these devices.

The NCP1399 is a current mode LLC controller which means that the operating frequency of an LLC converter is not controlled via voltage (or current) controlled oscillator but is directly derived from the resonant capacitor voltage signal and actual feedback level. This control technique brings several benefits compare to traditional voltage mode controllers like improved line and load transient response and inherent out of zero voltage switching protection. The LLC controller also features built-in high voltage startup and PFC operation control pins that ease implementation of a power supply with PFC front stage and no standby power supply on board.

The enhanced light load operation of the LLC controller allows SMPS design to pass the latest no-load and light load consumption limits and still keeping output regulated with excellent transient response from no-load to full-load steps.

Key Features

- Wide Input Voltage Range
- Small Form Factor/High Power Density
- High Efficiency
- Low No-load Power Consumption
- Fast Startup
- X2 Capacitor Discharge Function
- Near Unity Power Factor
- Low Mains Operation Protection
- Overload Protection
- Secondary Short Circuit Protected
- Thermal Protection
- Regulated Output Under any Conditions
- Excellent Load and Line Transient Response
- Capability to Implement Off-mode for Extremely Low No-load Power Consumption

Detail Demo-board Schematic Description

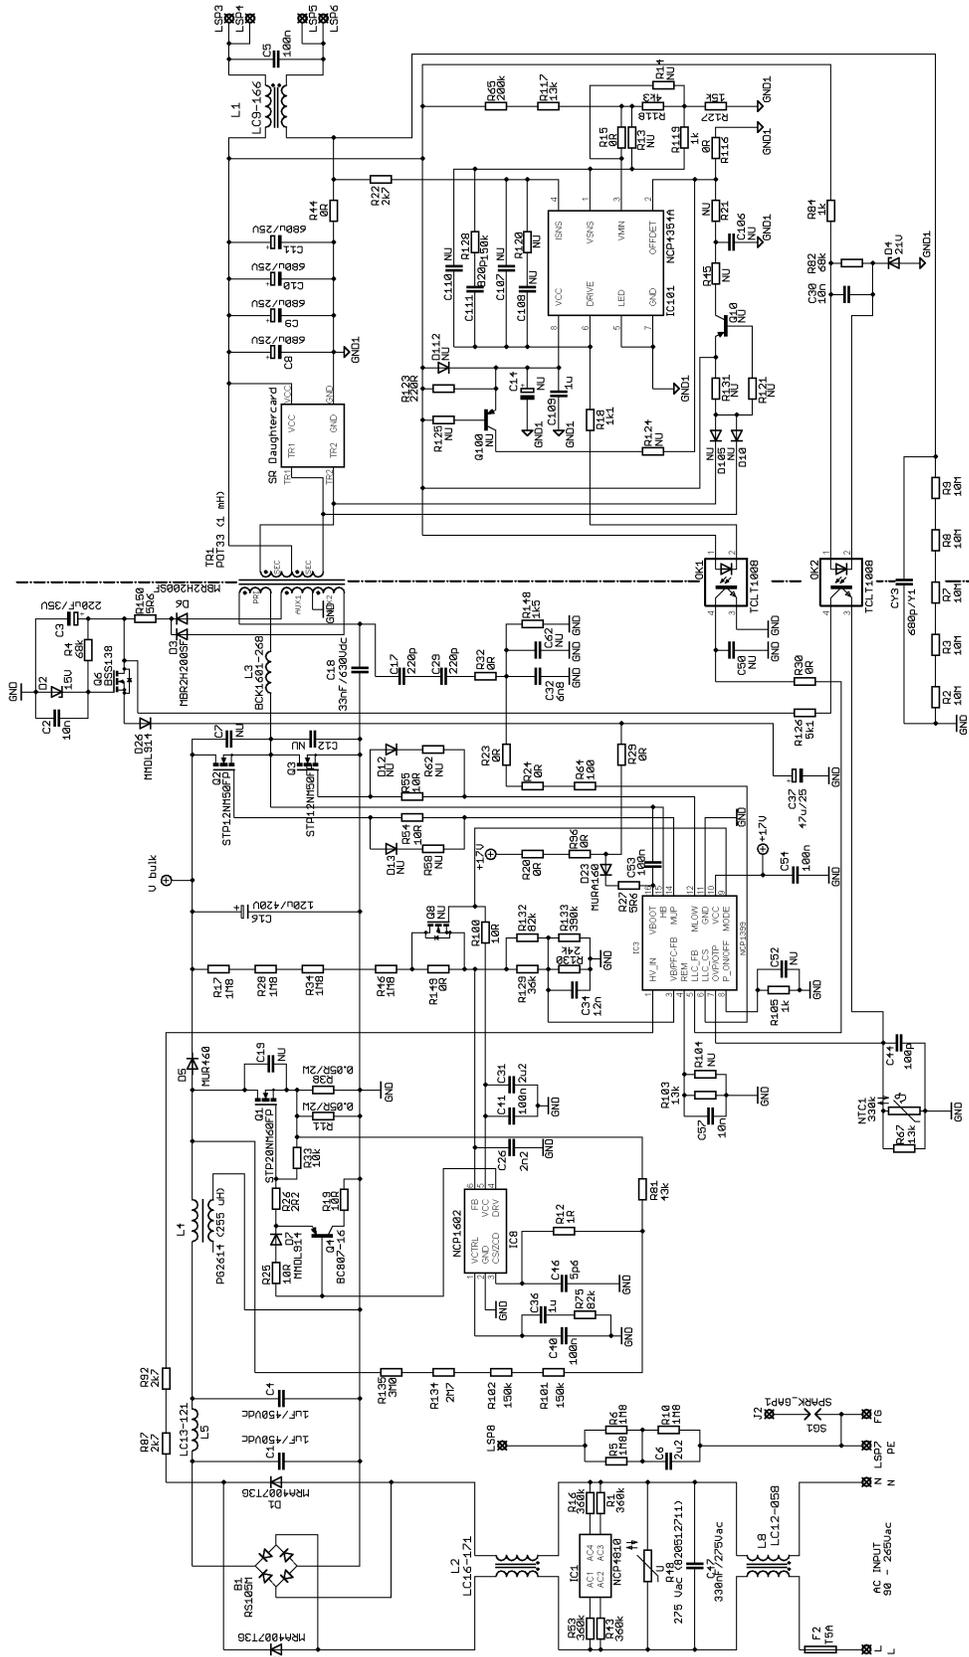


Figure 1. Laptop Adapter Demo-board – Main Board Schematic

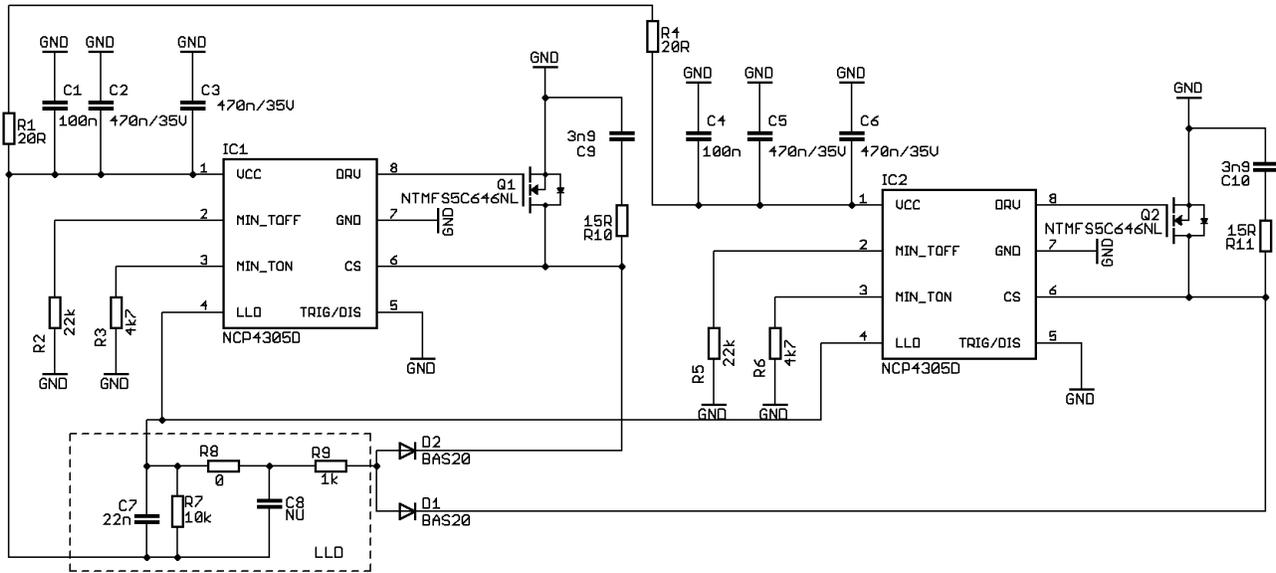


Figure 2. Laptop Adapter Demo-board – SR Daughtercard Schematic

The input EMI filter is formed by components L₈, L₂, L₅, C₄₇, C₁, C₄, C₆, R₅, R₆, R₁₀ and R₄₈. The IC₁ (NCP4810) with safety resistors R₁, R₁₆, R₄₃, R₅₃ is used to assure lose-less X2 capacitor discharge function after application is disconnected from the mains.

The PFC power stage uses standard boost PFC topology formed by power components B₁, L₁, D₅, Q₁, R₁₁, R₃₈, and bulk capacitor C₁₆. The PFC controller IC₈ (NCP1602) senses input voltage indirectly – via PFC power MOSFET drain voltage sensing network R₁₃₅, R₁₃₄, R₁₀₂ and R₁₀₁. The PFC coil current is sensed by the shunt resistors R₁₁ and R₃₈. The series resistor R₈₁ defines maximum PFC front stage peak current. The PFC feedback divider is shared with LLC brown-out sensing network in order to reduce application no-load power consumption. The PFC FB/LLC BO divider is formed by resistors R₁₇, R₂₈, R₃₄, R₄₆, R₁₂₉, R₁₃₀, R₁₃₂, R₁₃₃ and R₁₄₉. The FB signal is filtered by capacitor C₂₆ to overcome possible troubles caused by the parasitic capacitive coupling between pin and other nodes that handle high dV/dt signals. The internal bulk voltage regulator compensation C₄₀, C₃₆ and R₇₅ is connected to the IC₈ pin 1. The PFC MOSFET is driven via circuitry R₁₉, R₂₅, R₂₆, R₃₃, D₇ and Q₄. This solution allows to select needed turn-on and turn-off process speed for Q₁ and also to handle gate discharge current in local loop – minimizing EMI caused by the driver loop.

The LLC power stage primary side composes from these devices: MOSFETs Q₂, Q₃, external resonant coil L₃, transformer TR₁ and resonant capacitor C₁₈. The IC₃ (NCP1399Ax) LLC controller senses primary current indirectly – via resonant capacitor voltage monitoring which is divided down by capacitive divider R₃₂, C₁₇, C₂₉, C₃₂ and C₆₂. The capacitive divider has to provide minimum phase shift between resonant capacitor signal and divided signal on the LLC_CS pin. The capacitive divide has to be loaded

in the same time to assure fast LLC_CS pin signal stabilization after application startup – this is achieved by resistor R₁₄₈. The series resistor R₂₃, R₂₄, and R₆₄ is used to limit maximum current that can flow into the LLC_CS pin. The FB optocoupler OK₁ is connected to the LLC_FB pin and defines converter output by pulling down this pin when lower output power is needed. Capacitor C₅₀ forms high frequency pole in FB loop characteristics and helps to eliminate eventual noise that could be coupled to the FB pin by parasitic coupling paths. The Brown-Out resistor sensing network was already described in PFC section as it is shared with PFC feedback sensing. The Skip/REM pin of the NCP1399 is used for skip threshold adjustment in this demo-board option. Resistors R₁₀₃ and R₁₀₄ are used for this purpose together with noise filtering capacitor C₅₇. The over-voltage and over-temperature protections are implemented via OVP/OTP pin by using resistor R₆₇, temperature dependent resistor NTC₁, filtering capacitor C₄₄ and optocoupler OK₂. The OVP comparator is located on the secondary side to assure maximum OVP circuitry accuracy. The PFC ON/OFF function is not used in this revision of demo-board – i.e. the bulk voltage is regulated to nominal level during entire board operation (full, medium, light or no-load conditions) thus the P_ON/OFF pin is connected to ground via resistor R₁₀₅. The PFC_MODE pin provides bias to the PFC controller via series resistor R₁₀₀ after high enough voltage is available on the LLC VCC capacitors C₃₇. The VCC decoupling capacitor C₅₄ and also bootstrap capacitor for high side driver powering C₅₃ are located as close to the LLC controller package as possible to minimize parasitic inductive coupling to other IC adjust components due to high driver current peaks that are present in the circuit during drivers rising and falling edges transitions. The bootstrap capacitor is charged via HV bootstrap diode D₂₃ and series resistor R₉₆ which limits

charging current and V_{boot} to HB power supply slope during initial C_{53} charging process. The gate driver currents are reduced by added series resistors R_{54} , R_{55} to optimize EMI signature of the application.

The primary controllers bias voltage limiter circuitry is used in order to restrict upper value of the primary V_{CC} voltage to approximately 13 V. The VCC limiter composes of these components: resistors R_4 , R_{150} , capacitors C_2 , C_3 , diodes D_3 , D_2 , D_6 , D_{26} and transistor Q_6 .

The secondary side synchronous rectification is located on separated Daughter-card and uses IC_1 and IC_2 SR controllers – NCP4305D. The SR MOSFETs for each SR channel are Q_1 and Q_2 . RC snubber circuits C_9 , R_1 , C_{10} and R_{11} , are used to damp down the parasitic ringing and thus limit the maximum peak voltage on the SR MOSFETs. The SR controllers are supplied from converter output via resistors R_1 and R_4 . These resistors form RC filter with decoupling capacitors C_1 to C_6 . The minimum on-time – R_3 , R_6 and minimum off-time – R_2 , R_5 resistors define needed blanking periods that help to overcome SR controllers false triggering to ringing in the SR power stage. The light load detection circuit (LLD) is formed by resistors R_7 , R_8 , R_9 capacitor C_7 , C_8 , and diodes D_1 , D_2 . The SR controllers are disabled by LLD circuitry when application enters skip

mode – this helps to reduce no-load power consumption of application. The trigger/disable function of NCP4305 is not used in this application thus the corresponding pins are grounded.

The output voltage of the converter is regulated by Secondary Side Sleep mode Controller NCP4354A – IC_{101} . The regulation optocoupler OK_1 is driven via resistor R_{18} which defines loop gain. The NCP4354 is biased via resistor R_{123} with decoupling capacitor C_{109} . The output voltage is adjusted by divider R_{65} , R_{117} , R_{118} , R_{127} and R_{119} . The feedback loop compensation network is formed partially by these components, resistor R_{128} and capacitor C_{111} . The output filtering capacitor bank composes from low ESR capacitors C_8 to C_{11} . Output filter L_1 , C_5 is used to clean out output voltage from switching glitches.

The secondary side OVP sense circuitry is using zener diode D_4 , resistors R_{82} , R_{84} and capacitor C_{30} . The OVP threshold is adjusted by selected type of zener diode.

There are several options prepared in the PCB layout so that customer can modify demo-board according to his target application needs. Mentioned options for instance allow implementation of off-mode control from secondary side to further reduce no-load power consumption or different PFC front stage controller implementation.

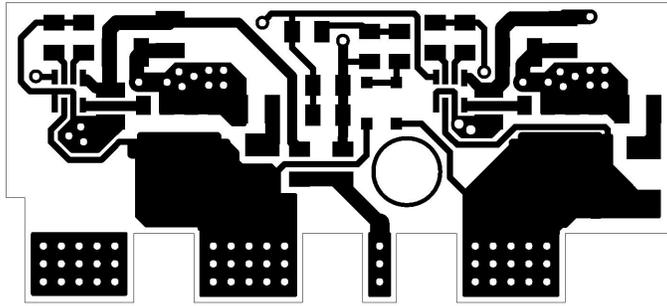


Figure 6. SR Daughtercard Board Top Layer

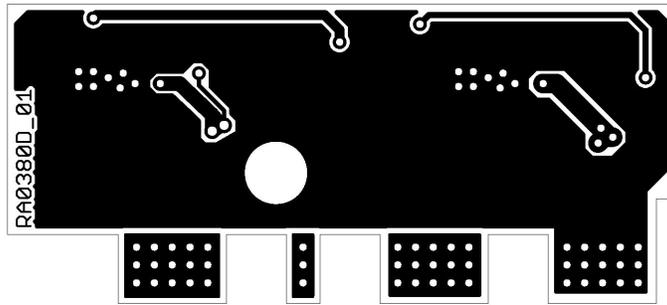


Figure 7. SR Daughtercard Board Bottom Layer

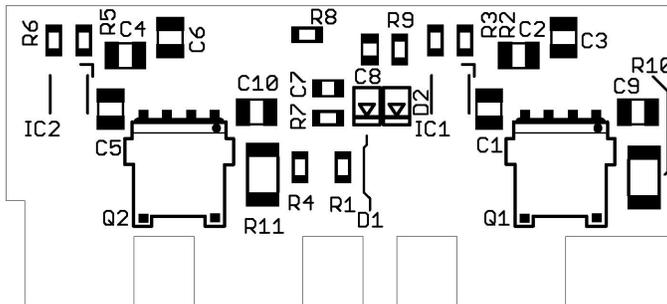


Figure 8. SR Daughtercard Board Top Side Components

EVBUM2341/D

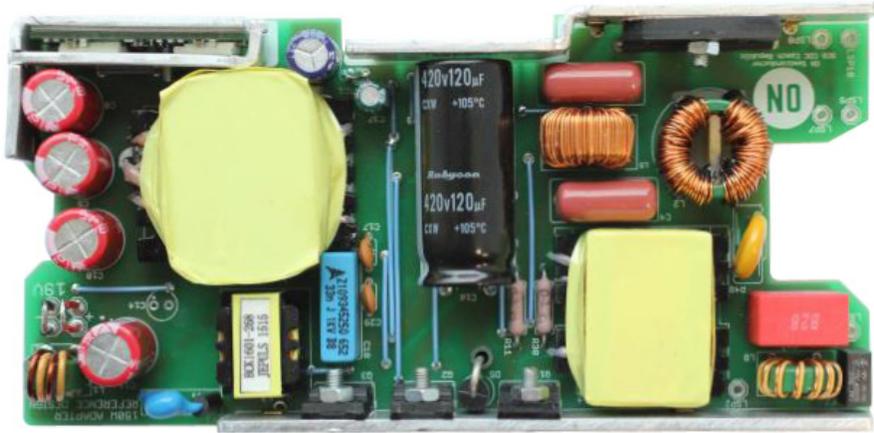


Figure 9. Main Board Photo – Top Side

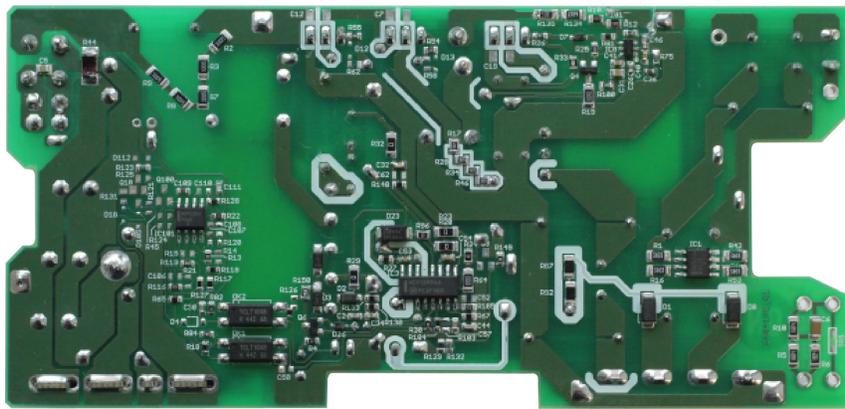


Figure 10. Main Board Photo – Bottom Side

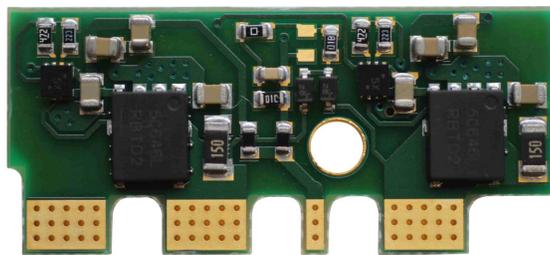


Figure 11. SR Daughtercard Board Photo – Top Side

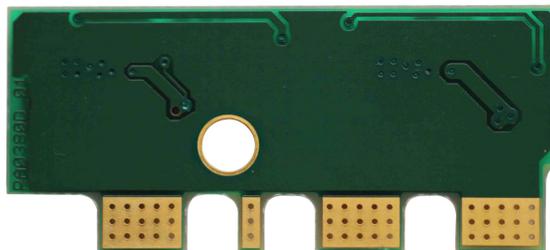


Figure 12. SR Daughtercard Board Photo – Bottom Side

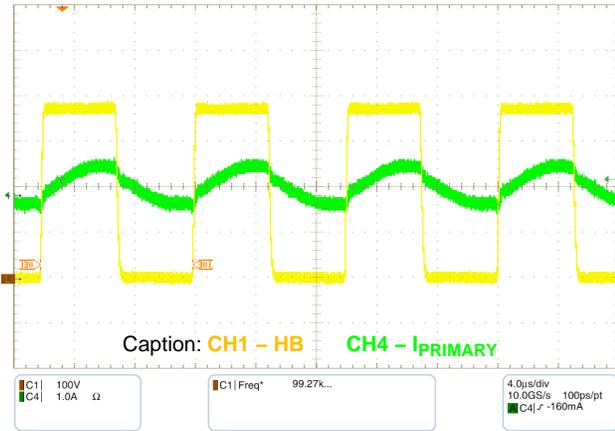


Figure 13. Steady Stage – I_{LOAD} = 2 A

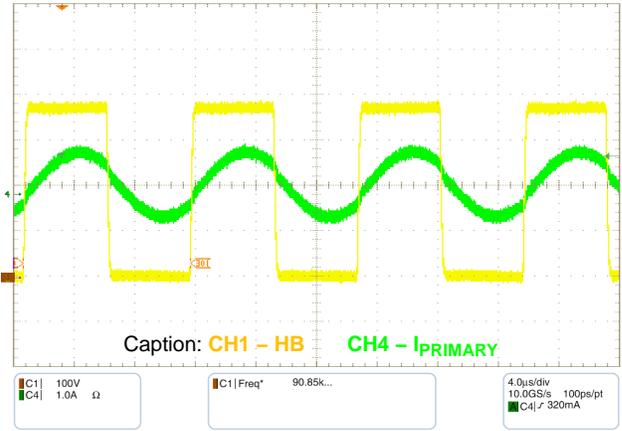


Figure 14. Steady Stage – I_{LOAD} = 4 A

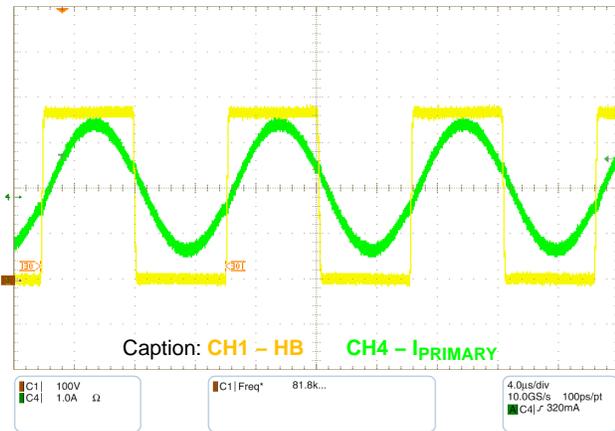


Figure 15. Steady Stage – I_{LOAD} = 8 A

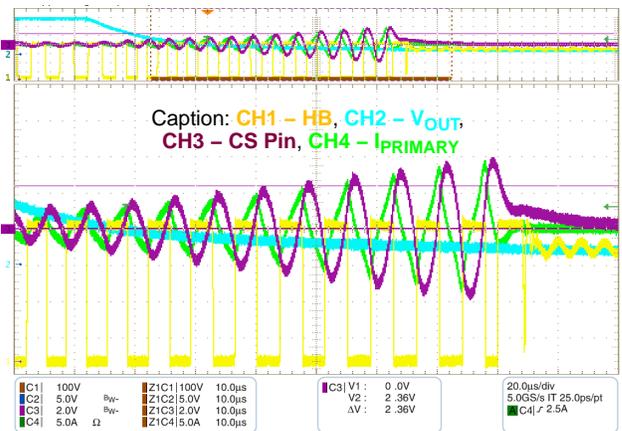


Figure 16. Secondary Short Transition

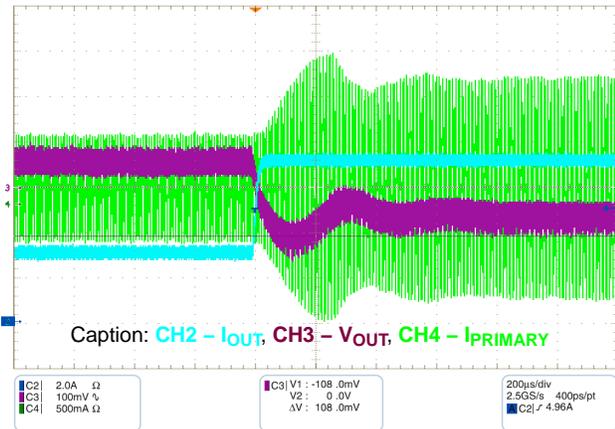


Figure 17. Transition Response – Load Step from 3 to 7 A

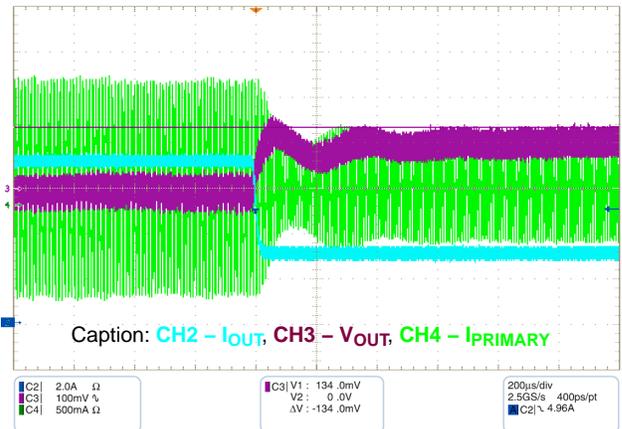


Figure 18. Transition Response – Load Step from 7 to 3 A

EVBUM2341/D

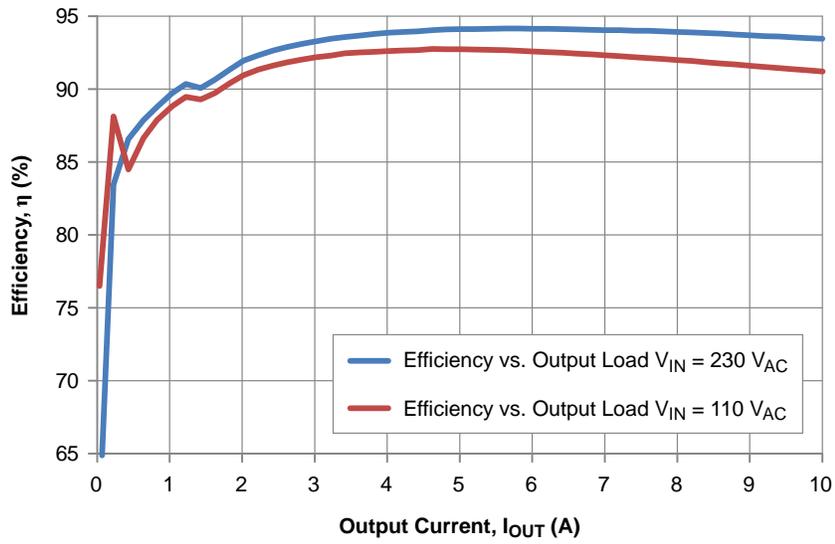


Figure 19. Board Efficiency – Including PFC Stage

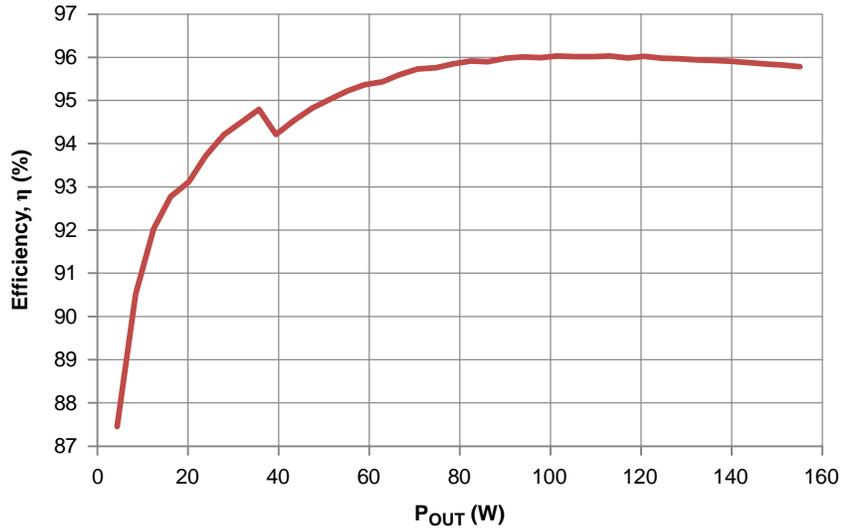


Figure 20. Board Power Stage with SR Efficiency $V_{IN} = 385 V_{DC}$

Table 2. NO-LOAD INPUT POWER CONSUMPTION

Input Voltage	Power Consumption
110 V_{AC}	114 mW
230 V_{AC}	123 mW

EVBUM2341/D

Table 3. BILL OF MATERIALS

Parts	Qty	Description	Value	Tolerance	Footprint	Manufacturer	Manufacturer Part Number	Substitution Allowed
B1	1	Bridge Rectifier	KBJ608G	-	KBJ608G	Diodes Incorporated	KBJ608G	Yes
C1, C4	2	MKP Film Capacitors	1 μ F/450 V _{DC}	10%	Through Hole	Panasonic	667-ECW-FD2W105J4	Yes
C111	1	Ceramic Capacitor	820 pF	10%	0603	Kemet	C0603C821K3RACTU	Yes
C14	1	Electrolytic Capacitor	NU	-	Through Hole	-	-	Yes
C16	1	Electrolytic Capacitor	120 μ F/420 V	20%	Through Hole	Rubycon	420CXW120MEFR16x35	Yes
C17, C29	2	Ceramic Capacitor	220 pF/1 kV	20%	Through Hole	Vishay	S221M39SL0N63K7R	Yes
C18	1	Film Capacitors	33 nF/1 kV _{DC}	5%	Through Hole	EPCOS/TDK	B32652A0333J000	Yes
C2, C30, C57	3	Ceramic Capacitor	10 nF	10%	0603	Kemet	C0603C103K3RACTU	Yes
C26	1	Ceramic Capacitor	2.2 nF	10%	0603	Kemet	C0603C222K3RACTU	Yes
C3	1	Electrolytic Capacitor	220 μ F/35 V	20%	Through Hole	PANASONIC	EEU-FM1V221L	Yes
C31	1	Ceramic Capacitor	2.2 μ F/25 V	10%	0805	Kemet	C0805C225K3RAC7800	Yes
C32	1	Ceramic Capacitor	6.8 nF	10%	0603	Kemet	C0603C682K3RACTU	Yes
C34	1	Ceramic Capacitor	12 nF	10%	0603	Kemet	C0603C123K3RACTU	Yes
C36, C109	2	Ceramic Capacitor	1 μ F	10%	0603	Kemet	C0603C105K3RACTU	Yes
C37	1	Electrolytic Capacitor	47 μ /25 V	20%	Through Hole	PANASONIC	ECA-1EHG470	Yes
C40, C41, C53, C54	4	Ceramic Capacitor	100 nF	10%	0603	Kemet	C0603C104K3RACTU	Yes
C44	1	Ceramic Capacitor	100 pF	10%	0603	Kemet	C0603C101K3RACTU	Yes
C46	1	Ceramic Capacitor	5.6 pF	10%	0603	Kemet	C0603C150K5GACTU	Yes
C47	1	MKP Film Capacitors	330 nF/ 310 V _{AC}	10%	Through Hole	Würth Elektronik	890334024003	Yes
C5	1	Ceramic Capacitor	100 nF	10%	0805	Kemet	C0805C104K5RACTU	Yes
C50, C52, C62, C106, C107, C108, C110	7	Ceramic Capacitor	NU	-	0603	-	-	Yes
C6	1	Ceramic Capacitor	2.2 μ F	10%	1206	Kemet	C1206C222K5RACTU	Yes
C7, C12, C19	3	Ceramic Capacitor	NU	-	1206	-	-	Yes
C8, C9, C10, C11	4	Electrolytic Capacitor	680 μ /25 V	20%	Through Hole	Würth Elektronik	860020475016	Yes
CY3	1	Ceramic Capacitor	680 pF/Y1	10%	Through Hole	Murata	DE1B3KX681KN4AP01F	Yes
D1, D8	2	Power Rectifier Diode	MRA4007	-	SMA	ON Semiconductor	MRA4007T3G	No
D10, D12, D13, D105, D112	5	Diode	NU	-	SOD323	-	-	Yes
D2	1	Zener Diode	15 V	5%	SOD-123	ON Semiconductor	MMSZ15T1G	No
D23	1	Ultrafast Power Rectifier Diode	MURA160	-	SMA	ON Semiconductor	MURA160T3G	No
D3, D6	2	Schottky Power Rectifier Diode	MBR2H200SF	-	SOD-123	ON Semiconductor	MBR2H200SFT3G	No
D4	1	Zener Diode	15 V	5%	SOD-123	ON Semiconductor	MMSZ22T1G	No
D5	1	Ultra-Fast Recovery	MUR460	-	TO-220 (2 LEAD)	ON Semiconductor	MUR460RLG	No
D7, D26	2	Switching Diode	MMDL914	-	SOD323	ON Semiconductor	MMDL914T1G	No
F2	1	FUSE	T4A	-	Through Hole	Bussmann/Eaton	SS-5H-4A-BK	Yes
IC1	1	X2 Capacitor Discharger	NCP4810	-	SOIC-8	ON Semiconductor	NCP4810DR2G	No
IC101	1	Secondary Side Sleep Mode Controller	NCP4354A	-	SOIC-8	ON Semiconductor	NCP4354ADR2G	No
IC3	1	Resonant Mode Controller	NCP1399	-	SOIC-16	ON Semiconductor	NCP1399_DR2G	No
IC8	1	Power Factor Controller	NCP1602	-	TSOP-6	ON Semiconductor	NCP1602DCCSNT1G	No
L1	1	Inductor	LC9-166	20%	T10*6*5C K08	JEPULS	LC9-166 (150311600)	Yes
L2	1	Emi Filter	LC16-171	20%	T16*12*8C	JEPULS	LC16-171 (150311400)	Yes
L3	1	Resonant Inductor	BCK1601-268	10%	EE16/12/7	JEPULS	BCK1601-268 (150040300)	Yes

EVBUM2341/D

Table 3. BILL OF MATERIALS (continued)

Parts	Qty	Description	Value	Tolerance	Footprint	Manufacturer	Manufacturer Part Number	Substitution Allowed
L4	1	PFC Inductor	PG2614 (255 μ H)	10%	PQ2614	Global Choice International LLC	6142516090	Yes
L5	1	Emi Filter	LC13-121	20%	T50-26B	JEPULS	LC13-121 (150311500)	Yes
L8	1	Emi Filter	LC12-058	20%	T12*6*4C	JEPULS	LC12-058 (150311300)	Yes
M1	1	SR Daughtercard	-	-	-	ON Semiconductor	-	NO
NTC1	1	Thermistor	330 k Ω	-	Through Hole	Vishay	NTCLE100E3334JB0	Yes
OK1, OK2	2	Opto Coupler	TCLT1008	-	DIL4-SMD	Vishay	TCLT1008	Yes
Q1	1	N-Channel Power MOSFET	STP20NM60FP	-	TO-220	ST Microelectronics	STP20NM60FP	Yes
Q10, Q100	2	PNP Transistor	NU	-	SOT-23	-	-	Yes
Q2, Q3	2	N-Channel Power MOSFET	STP12NM50FP	-	TO-220	ST Microelectronics	STP12NM50FP	Yes
Q4	1	PNP General Purpose Transistor	BC807	-	SOT-23	ON Semiconductor	BC807-16LT1G	No
Q6	1	N-Channel Small Signal MOSFET	BSS138	-	SOT-23	ON Semiconductor	BSS138LT1G	No
Q8	1	N-Channel MOSFET	NU	-	SOT-23	-	-	Yes
R1, R16, R43, R53	4	Resistor SMD	360 k Ω	1%	1206	Rohm Semiconductor	MCR18ERTJ364	Yes
R100	1	Resistor SMD	10 Ω	1%	0805	Rohm Semiconductor	MCR10EZPF10R0	Yes
R101, R102	2	Resistor SMD	150 k Ω	1%	0805	Rohm Semiconductor	MCR10EZPF1503	Yes
R11, R38	2	Power Resistor	0.05 Ω /2 W	1%	Through Hole	WLCR050FET	Ohmite	Yes
R118	1	Resistor SMD	4.3 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF4301	Yes
R12	1	Resistor SMD	1 Ω	1%	0603	Rohm Semiconductor	MCR03ERTFL1R00	Yes
R123	1	Resistor SMD	220 Ω	1%	0603	Rohm Semiconductor	MCR03ERTF2200	Yes
R126	1	Resistor SMD	5.1 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF5101	Yes
R127	1	Resistor SMD	15 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF1502	Yes
R128	1	Resistor SMD	150 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF1503	Yes
R129	1	Resistor SMD	36 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF3602	Yes
R13, R30, R116, R149	4	Resistor SMD	0 Ω	1%	0603	Rohm Semiconductor	MCR03EZPJ000	Yes
R130	1	Resistor SMD	24 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF2402	Yes
R133	1	Resistor SMD	390 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF3903	Yes
R134	1	Resistor SMD	2.7 M Ω	5%	1206	Rohm Semiconductor	MCR18ERTJ275	Yes
R135	1	Resistor SMD	3 M Ω	5%	1206	Rohm Semiconductor	MCR18ERTJ305	Yes
R14, R15, R21, R45, R58, R62, R104, R120, R121, R124, R125, R131	12	Resistor SMD	NU	-	0603	-	-	Yes
R148	1	Resistor SMD	1.5 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF1501	Yes
R17, R28, R34, R46	4	Resistor SMD	1.8 M Ω	5%	0805	Rohm Semiconductor	MCR25ZJH185	Yes
R18	1	Resistor SMD	1.1 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF1101	Yes
R19	1	Resistor SMD	10 Ω	1%	1206	Rohm Semiconductor	MCR18ERTJ100	Yes
R2, R3, R7, R8, R9	5	Resistor SMD	10 M Ω	5%	1206	Rohm Semiconductor	MCR18ERTJ106	Yes
R20, R23, R29, R32	4	Resistor SMD	0 Ω	-	1206	Rohm Semiconductor	MCR18EZJH000	Yes

EVBUM2341/D

Table 3. BILL OF MATERIALS (continued)

Parts	Qty	Description	Value	Tolerance	Footprint	Manufacturer	Manufacturer Part Number	Substitution Allowed
R22	1	Resistor SMD	2.7 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF2701	Yes
R24, R96	2	Resistor SMD	0 Ω	-	0805	Rohm Semiconductor	MCR10EZPJ000	Yes
R25, R54, R55	3	Resistor SMD	10 Ω	1%	0603	Rohm Semiconductor	MCR03ERTF10R0	Yes
R26	1	Resistor SMD	2.2 Ω	5%	0603	Rohm Semiconductor	MCR03ERTJ2R2	Yes
R27, R150	2	Resistor SMD	5.6 Ω	5%	0805	Rohm Semiconductor	MCR10EZHJ5R6	Yes
R33	1	Resistor SMD	10 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF1002	Yes
R4, R82	2	Resistor SMD	68 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF6802	Yes
R44	1	Resistor SMD	0 Ω	-	Wire Strap	-	-	Yes
R48	1	VARISTOR	275 V _{AC}	1%	Through Hole	Würth Elektronik	820512711	Yes
R5, R6, R10	3	Resistor SMD	1.8 M Ω	5%	0805	Rohm Semiconductor	MCR25JZHJ185	Yes
R64	1	Resistor SMD	100 Ω	1%	1206	Rohm Semiconductor	MCR18ERTF1000	Yes
R65	1	Resistor SMD	200 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF2003	Yes
R67, R103, R117	3	Resistor SMD	13 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF1302	Yes
R75, R132	2	Resistor SMD	82 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF8202	Yes
R81	1	Resistor SMD	43 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF4302	Yes
R84, R119, R105	3	Resistor SMD	1 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF1001	Yes
R87, R92	2	Resistor SMD	2.7 k Ω	1%	1206	Rohm Semiconductor	MCR18ERTF2701	Yes
TR1	1	Transformer	POT33 (1 mH)	5%	POT33	Global Choice International LLC	POT331026037	Yes

SR DAUGHTERCARD

C1, C4	2	Ceramic Capacitor	100 nF	10%	0805	Kemet	C0805C104K5RACTU	Yes
C2, C3, C5, C6	4	Ceramic Capacitor	470 nF/35 V	10%	0805	Taiyo Yuden	GMK212BJ474KG-T	Yes
C7	1	Ceramic Capacitor	22 nF	10%	0603	Kemet	C0603C223K3RACTU	Yes
C8	1	Ceramic Capacitor	NU	-	0603	-	-	Yes
C9, C10	2	Ceramic Capacitor	3.9 nF	10%	0805	Kemet	C0805C392K5RACTU	Yes
D1, D2	2	Switching Diode	BAS20HT1G	-	SOD323	ON Semiconductor	BAS20HT1G	No
IC1, IC2	2	Secondary Side Synchronous Rectifier	NCP4305	-	WDFN-8	ON Semiconductor	NCP4305DMNTWG	No
Q1, Q2	2	N-Channel Power MOSFET	NTMFS5C646NL	-	SO-8FL	ON Semiconductor	NTMFS5C646NLT1G	No
R1, R4	2	Resistor SMD	20 Ω	1%	0603	Rohm Semiconductor	MCR03ERTF20R0	Yes
R10, R11	2	Resistor SMD	15 Ω	1%	1206	Rohm Semiconductor	MCR18ERTF15R0	Yes
R2, R5	2	Resistor SMD	22 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF2202	Yes
R3, R6	2	Resistor SMD	4.7 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF4701	Yes
R7	1	Resistor SMD	10 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF1002	Yes
R8	1	Resistor SMD	0 Ω	1%	0603	Rohm Semiconductor	MCR03EZPJ000	Yes
R9	1	Resistor SMD	1 k Ω	1%	0603	Rohm Semiconductor	MCR03ERTF1001	Yes

NOTE: All parts are Pb-Free.

ON Semiconductor and the  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local
Sales Representative