

## The LIN Bus in Modern Automotive Headlamp Systems



**ON Semiconductor®**

<http://onsemi.com>

### TECHNICAL NOTE

#### Abstract

ON Semiconductor has been supplying mixed signal integrated circuits for automotive lighting systems for over a decade. High-volume products include lamp-failure detection, contact-less sensor interfaces, HID (High Intensity Discharge) ballast drivers and stepper motor drivers. Modern automotive headlamp systems will rely heavily on the use of sensors and actuators in the near future. These remote sensors and actuators are connected to an electronic control unit via a bus network. Various types of


bus networks are feasible. This paper will concentrate on the cost and performance advantages when using the LIN (Local Interconnect Network) bus network in a headlamp application. Various solutions will be presented providing insight into the different LIN bus architectures available. The integration of a stepper motor driver with LIN interface is demonstrated as an example. In conclusion, the LIN bus provides superior performance when combined with the appropriate system architecture for cost sensitive applications.

### INTRODUCTION

#### Headlamp Actuator Wiring Architecture and Elements

Figure 1 shows the basic components used throughout this text. The signals of chassis sensors (suspension, turn indicator, steering wheel, car speed, rain sensor and other) are connected through individual wiring or by means of a

multiplex bus to the “Light Control Unit” (or LCU). This unit contains – amongst other functions – the intelligence to process the sensor information and to drive small actuators in the headlamp according to the regulations.

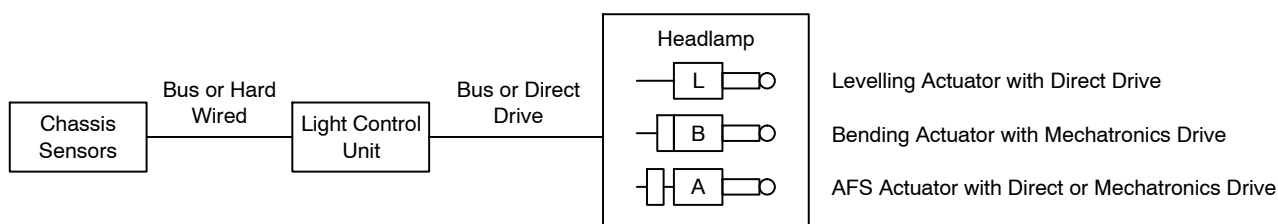

**Figure 1. Basic Wiring Elements**


The headlamp actuators are controlled by means of dedicated wiring (so-called “Direct Drive”) or using again a multiplex bus. A multiplex bus is ideally suited when used together with mechatronic modules. Mechatronic modules are compact assemblies of an actuator together with its drivers (typically power electronics). The wires connected to mechatronic modules carry (besides the supply lines) low-power control signals of the bus, while the wiring of

“Direct Drive” carries the PWM chopped current of the individual motor phases and some diagnostics or sensor feed-back signals. From these differences, it is clear that “Direct Drive” has a negative impact on technical aspects (EMC, cabling dimensions and routing), cost (number of wires, connectors, non-modularity) and finally, time-to-market (LCU hardware and cabling variations depending on lighting options require re-qualifications).

## LIN BASICS

A small introduction to LIN will aid understanding of the remaining chapters. LIN is essentially a low-cost network (or multiplex bus) with one master control unit and one or more slave control units. The LIN master initiates

communication by sending the “Header”. The “Data Fields” are sent by a LIN master or a LIN slave. Only one slave will respond to a given header.

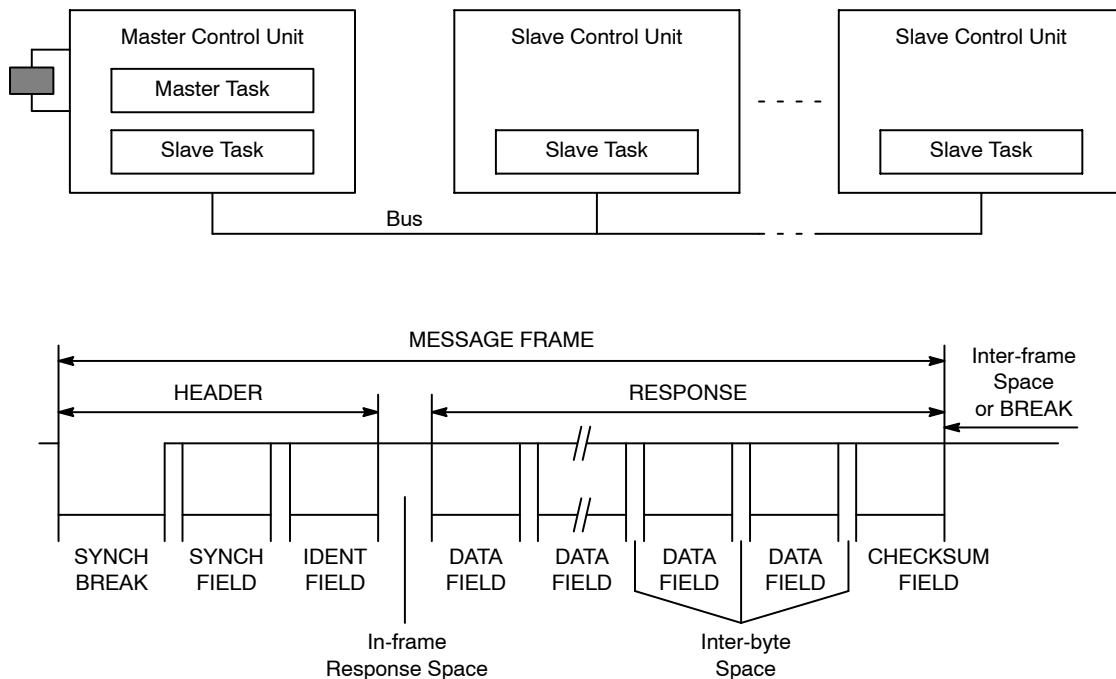

**Figure 2. LIN Basic Network and Message Frame**

The slave nodes cannot initiate communication: they only respond if triggered by specific identifier fields. The maximum communication speed on a LIN bus is 19,200 baud. The LIN nodes can therefore send/receive a full 8-byte command every 10 ms. Shorter commands can

even run every 5 ms. This bandwidth is large enough to drive leveling, bending, AFS (Adaptive Front lighting System) and ballast functions of a single headlamp, and it also provides high-quality diagnostics feed-back. Please refer to [lin-subbus.org](http://lin-subbus.org) for more information on LIN.

## HEADLAMP WIRING ARCHITECTURE CLASSIFICATION

The proposed classification is based on the headlamp type, wiring of the sensors, the physical location of LCU's, the types of the actuators and their wiring. This yields six variables with about 100 possible combinations. Taking into account the constraints mentioned in the last column of Table 1, 37 cases remain. These cases can then be categorized into five halogen architectures and six HID wiring types.

The drawings in the discussions below are simplified and oriented towards the position of the LCU and the actuator connections: the exact number of wires is not detailed; supply, diagnostics, and bulb wires are not taken into account.

Table 1. HEADLAMP WIRING CLASSIFICATION

| Variable         | Value        | Subtype                  | Name | Comments & Constraints                                                    |
|------------------|--------------|--------------------------|------|---------------------------------------------------------------------------|
| Headlamp Type    | Halogen      | Leveling                 | H1   | Actual Standard is S1, C1, L2                                             |
|                  |              | Leveling + Bending       | H2   | C3 too Expensive L1 not Standard if C1 or C2<br>-> only 1 out of (L1, B1) |
|                  | HID          | Leveling                 | H3   | Actual Standard is S1, C1, L1                                             |
|                  |              | Leveling + Bending       | H4   | If C1 or C2 -> only 1 out of (L1, B1)                                     |
|                  |              | Leveling + Bending + AFS | H5   |                                                                           |
| Sensor Signals   |              | Wired                    | S1   | No with C3 and (C2 Combined with H4 or H5)                                |
|                  |              | Bus                      | S2   |                                                                           |
| Control Unit     | Le Sing      | Car Interior             | C1   | S Variable Not Relevant                                                   |
|                  |              | Car Front                | C2   |                                                                           |
|                  | Dual         | 1 per Headlamp           | C3   |                                                                           |
| Leaving Actuator | Direct Drive |                          | L1   |                                                                           |
|                  | Multiplex    |                          | L2   |                                                                           |
| Bending Actuator | Direct Drive |                          | B1   | Variable Not Relevant for H1, H3                                          |
|                  | Multiplex    |                          | B2   |                                                                           |
| AFS Actuator     | Direct Drive |                          | A1   | Variable Not Relevant for H1, H2, H3, H4                                  |
|                  | Multiplex    |                          | A2   |                                                                           |

## HALOGEN WIRING ARCHITECTURES

### Cabin Location of Halogen LCU

Figure 3 summarizes the possible cases with only one control unit, this being located inside the passenger cabin. This is the standard location used today and allows simple connection of sensor signals to the control unit. Architecture H1 represents the actual standard halogen leveling with manual adjustment using a brushed DC motor in a mechatronic combination. Bending option (architecture H1a) is then a logical extension based on existing HID standard leveling technology (see Table 1). However, from a wiring point of view, architecture H1b is much more compatible with H1. An analog wire is replaced by LIN. On the position of the LCU for halogen bending systems, one solution is the integration within the standard manual adjust unit. A further improvement is to move the halogen LCU inside the dashboard control unit. By means of a standard central display and its push-buttons, a manual adjustment is accomplished and at the same time the light control system is right in the vicinity of speed and steering sensor information. This step would require the cooperation of lighting and dashboard tier-1 suppliers.

### Front Location of Single Halogen LCU

The architectures depicted in Figure 4 have only one control unit, located at the front-module, e.g., attached to one headlamp only. Headlamps are by nature not symmetrical, so this asymmetric mounting would not impact stock costs, but there might be objections against this architecture related to crash-sensitivity of lighting functions and system FMEA. Architecture H2a is based on re-use of existing building blocks (standard halogen and HID leveling technology). In H2b, the wiring is made simpler and will not change when bending function is added or removed (bending function is true add-on).

Architectures H2a and H2b would require an interface from standard manual leveling to PWM (or bus) in addition to a front-LCU and this may prove too expensive in a low-cost halogen market. It is reasonable to believe that architectures H1 and H1b are more attractive for the large cost optimized halogen market.

Alternatively, if sensor signals are available on a bus or PWM, then architectures H2a and H2b show interesting wiring compatibility with HID systems (see chapters below).

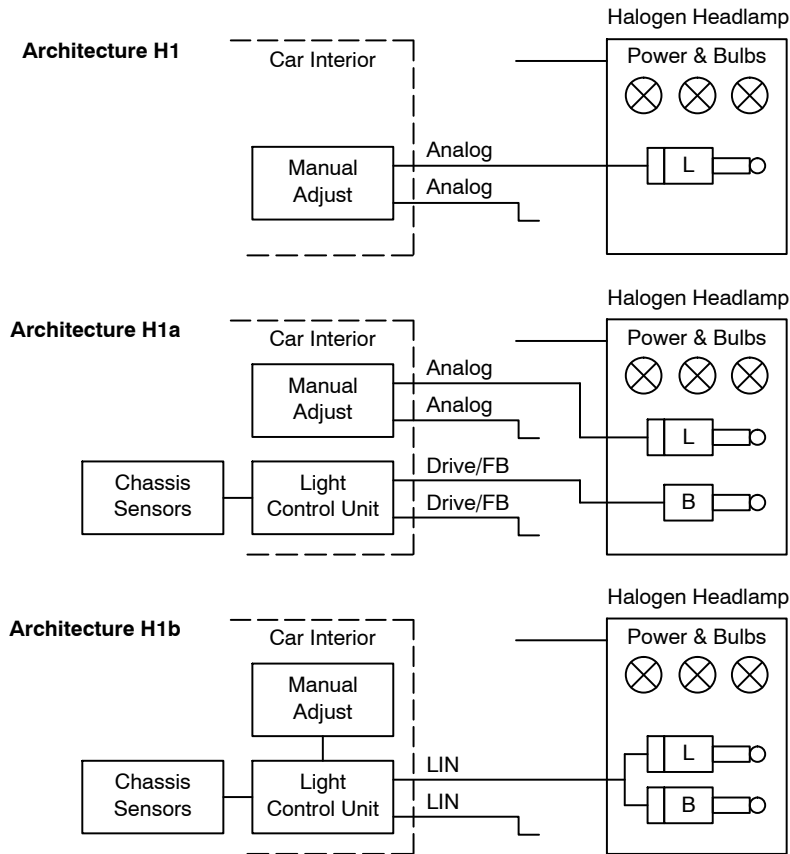


Figure 3. Halogen, Cabin Location of LCU

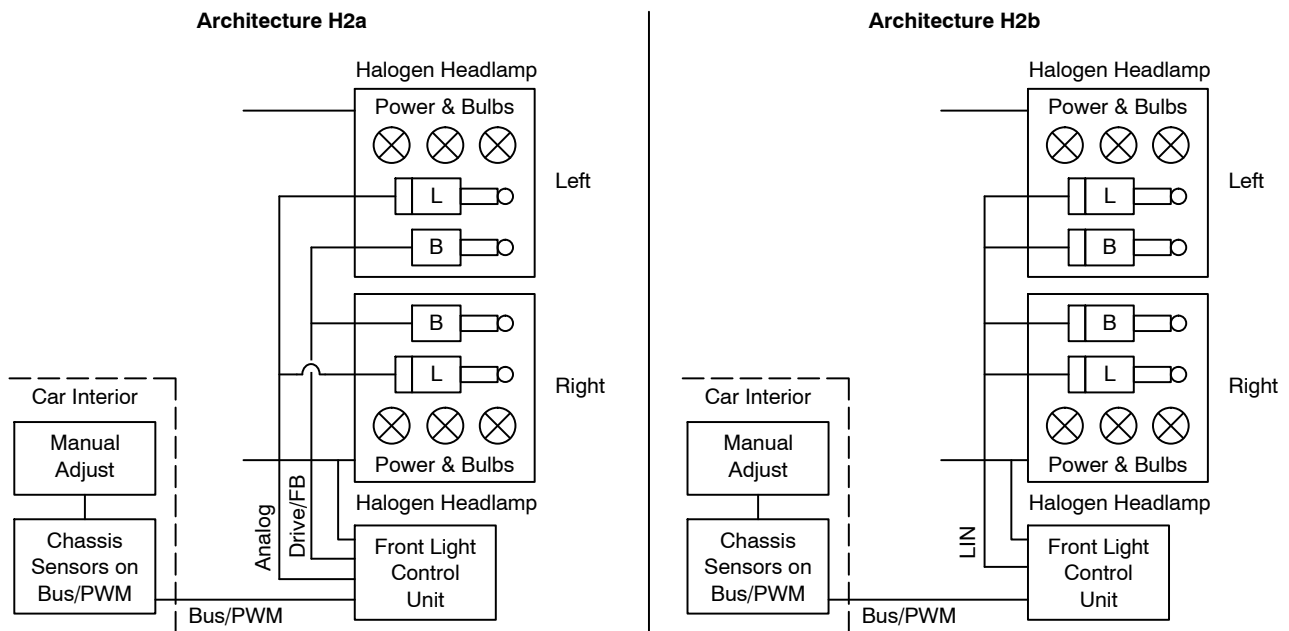


Figure 4. Halogen, Front Location of LCU

## HID WIRING ARCHITECTURES

## Cabin Location of HID LCU

Currently, the passenger cabin is the standard location of HID leveling LCU, because it is in the vicinity of the chassis sensors. These sensors are not required to be on a bus system (PWM is also ok). In both cases (see Figure 5), adopting the LIN bus minimizes cost-additions for bending and AFS functionality. Architecture X1a suffers from high-complexity wiring where direct drive is used for more than one actuator, while X1b reduces wiring and the impact

of varying lighting options is reduced to an absolute minimum: all actuators are driven through LIN-mechatronic modules. An interesting item is the connection of the Xenon ballast to LIN for diagnostics and, for example, the control of light output. Architecture X1b is highly compatible with the H1b architecture discussed above; this is important for car platforms that need both bending halogen and HID headlamp options.

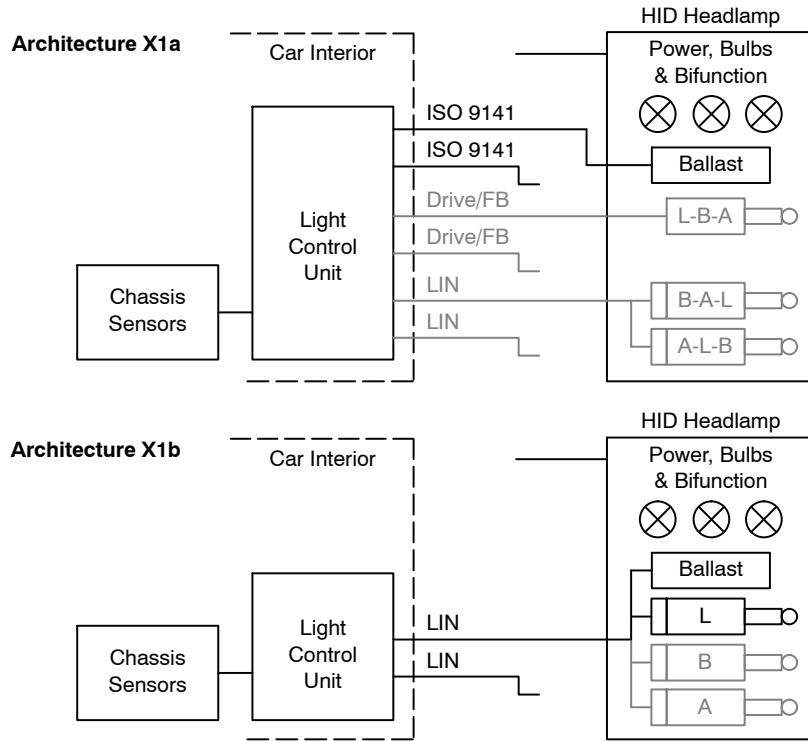


Figure 5. HID, Cabin Location of LCU


## Front Location of Single HID LCU

Figure 6 shows an asymmetric headlamp configuration with the possibility to mount the LCU directly on the ballast unit. Architectures X2a and X2b are highly compatible with the H1a and H1b proposals, with potential differences in the sensor bus topology: CAN or LIN, depending on the amount of sensor data needed for AFS systems and on-board-diagnostics requirements. A bus carrying sensor signals is preferred for HID systems as the wiring architecture does not need to change with variations in the number of attached sensors (number of sensor signals increase from leveling to bending to AFS) and the bus can be re-used for diagnostic purposes of the LCU and the headlamps. The advantage of LIN for front-mounted HID LCU's is again the modularity and the reduction of wiring complexity in the front-module.

## Front Location of Dual HID LCU

The architectures depicted in Figure 7 require one LCU per headlamp. The sensor-bus is again re-used for diagnostics. In X3a, the electronics board of the LCU contains the leveling drivers, together with bus mastering for the other options like bending and AFS. This is then combined with software to master the regulatory requirements. X3b also shows the leveling performed through LIN. Drawbacks of both architectures are the relatively high-cost and incompatibility with halogen architectures. The advantage of LIN for X3a and X3b is again the modularity and the reduction of wiring complexity in and around the headlamp itself.

Architecture X2a

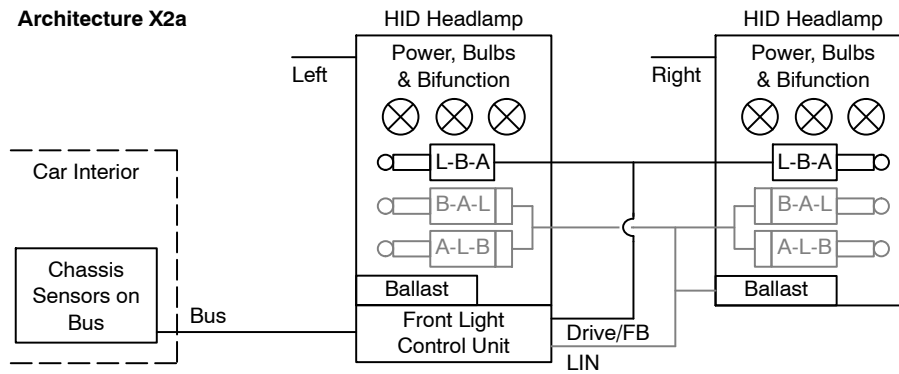

Architecture X2b


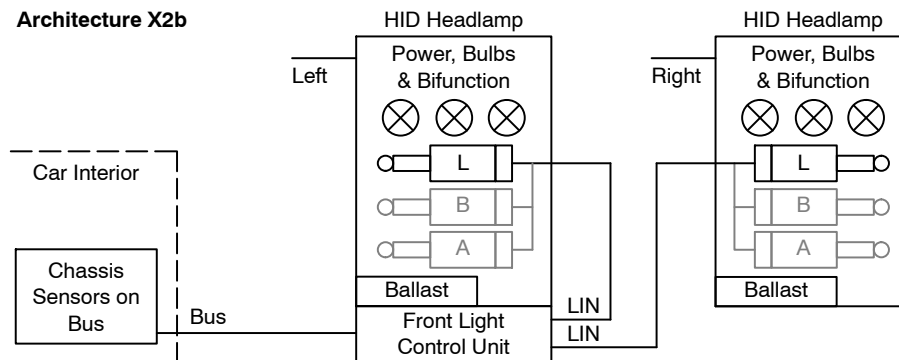


Figure 6. HID, Front Location of Single LCU

Architecture X3a

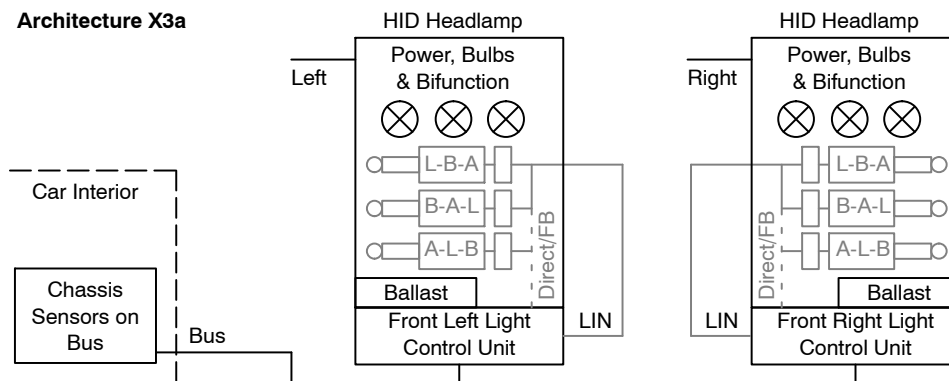

Architecture X3b

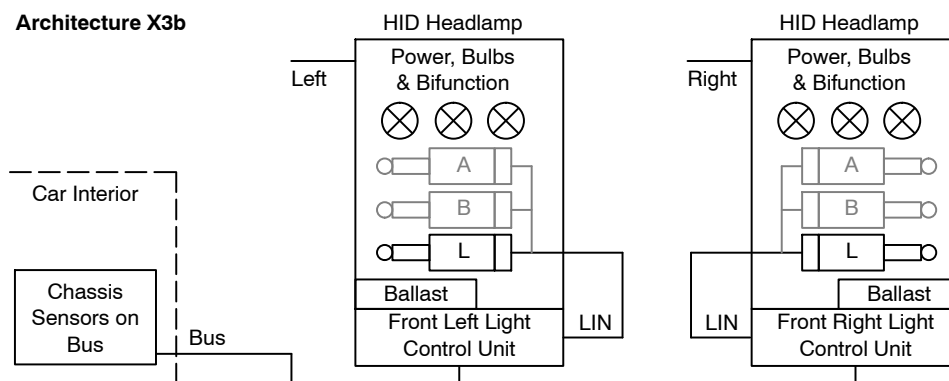


Figure 7. HID, Front Location of Dual LCU

## DISCUSSION ON ARCHITECTURES

Considering the simplicity of wiring, architectures H1b and X1b are candidates to become “the architectures of choice” in headlamp systems for the coming years. The driving force would be the high potential of bending light in a cost-sensitive halogen market. Both architectures are compatible with the two types of sensor wiring (bus and PWM) and are compatible with standard halogen and HID leveling systems to date.

Architectures H2 and X2 offer possibilities for high-end car-platforms that still have a substantial halogen

penetration. The advantage is the removal of the LCU outside the passenger compartment (space requirements).

Architecture X3 seems to be an expensive solution, but will certainly be important for high-end car platforms with nearly no halogen penetration.

In any case, the architecture of choice will be made by the OEM's and the Tier1 headlamp suppliers and is related to the penetration rate of halogen/HID in the car type and the forecasted headlamp options (leveling, bending, AFS).

## LIN MOTOR DRIVER FOR HEADLAMP MECHATRONIC APPLICATIONS

With the exception of halogen leveling, the motors used in headlamps are stepper motors. ON Semiconductor has developed LIN solutions to support mechatronic applications utilizing stepper motors. The LIN technology also enables the use of the LIN bus outside the local scope of subsystems in a car. It is now possible to network modules in the front of the car with LCU's inside the passenger compartment by means of a LIN bus. An example of such a LIN slave product is the AMIS-30621 stepper motor driver, which contains a well-balanced LIN command set, an

advanced state-machine to perform positioning tasks and high-power drivers to activate the motor coils. Detailed diagnostics feed-back helps the LIN master (which is situated in the LCU) to obtain all necessary information of the mechatronic module.

Upon LIN wire break or other LIN malfunction, the motor adopts a safety position to meet regulation requirements. Other features of interest are micro-stepping capability and stall detection. Figure 8 shows an indicative application diagram; more information is available in the literature.

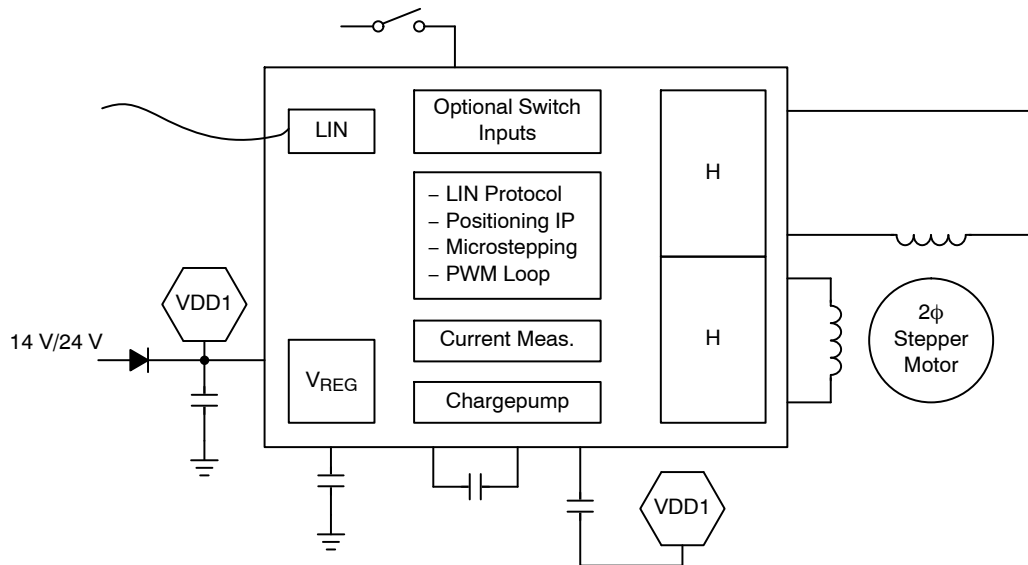


Figure 8. Application Diagram LIN Stepper Motor

**CONCLUSION**

A classification of wiring architectures of headlamp actuator systems was discussed. It is shown that in all discussed architectures, LIN offers increased modularity, reduced complexity and variation of wiring harness and reduced EMC emissions. This results in system cost

reduction, increased performance and shorter time-to-market. ON Semiconductor has the right technology and products available to support headlamp system developers with LIN mechatronic solutions.

**REFERENCES**

- [1] <http://www.lin-subbus.org>
- [2] Gerd Bahnmüller, "Headlamp Development-Reduced Time to Market", PAL 2001 Symposium, Darmstadt University of Technology.
- [3] Alexis Dubrovin, "Optimised Lighting Systems Architecture", PAL 2001 Symposium, Darmstadt University of Technology.
- [4] Michael Hamm, "System Strategies for Adaptive Lighting Systems", PAL 2001 Symposium, Darmstadt University of Technology.
- [5] Geert Vandensande, "System-on-Chip Slave Nodes", paper presented at 1st International LIN Conference, September 2002, Ludwigsburg.
- [6] John V. DeNuto et al., "LIN Bus and its Potential for use in Distributed Multiplex Applications", SAE Technical Paper 2001-01-0072.

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

**PUBLICATION ORDERING INFORMATION****LITERATURE FULFILLMENT:**

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative