

REVISIONS

LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Drawing updated to reflect current requirements. - ro	01-07-10	R. Monnin
B	Redraw. Update drawing to the current format. - drw	12-08-01	Charles F. Saffle

REV																			
SHEET																			
REV																			
SHEET																			


REV STATUS	REV	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
OF SHEETS	SHEET	1	2	3	4	5	6	7	8	9	10	11	12	13	14			

PMIC N/A	PREPARED BY Dan Wonnell	<p align="center"><b>DLA LAND AND MARITIME</b>  <b>COLUMBUS, OHIO 43218-3990</b>  <a href="http://www.landandmaritime.dla.mil">http://www.landandmaritime.dla.mil</a></p> <p align="center"><b>MICROCIRCUIT, DIGITAL-LINEAR, ANALOG MULTIPLEXER, MONOLITHIC SILICON</b></p>																
<p align="center"><b>STANDARD MICROCIRCUIT DRAWING</b></p> <p>THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE</p>	CHECKED BY Sandra Rooney																	
	APPROVED BY Michael A. Frye																	
	DRAWING APPROVAL DATE 93-07-07																	
AMSC N/A	REVISION LEVEL B	SIZE A	CAGE CODE <b>67268</b>	<b>5962-90635</b>														
		SHEET 1 OF 14																

1. SCOPE

1.1 Scope. This drawing documents two product assurance class levels consisting of high reliability (device classes Q and M) and space application (device class V). A choice of case outlines and lead finishes are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of Radiation Hardness Assurance (RHA) levels is reflected in the PIN.

1.2 PIN. The PIN is as shown in the following example:

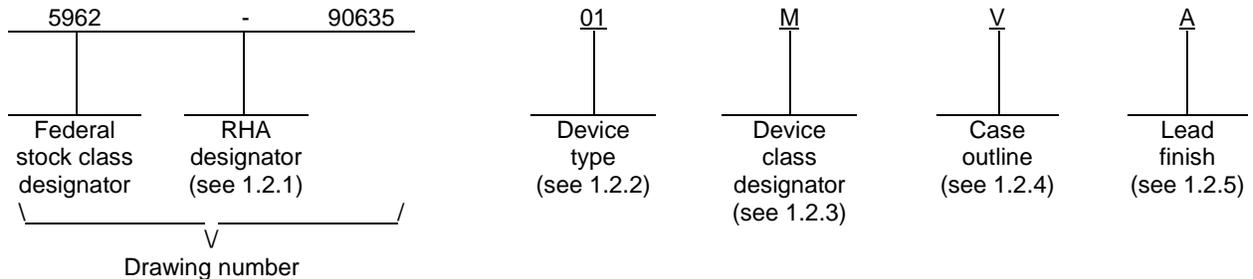

1.2.1 RHA designator. Device classes Q and V RHA marked devices meet the MIL-PRF-38535 specified RHA levels and are marked with the appropriate RHA designator. Device class M RHA marked devices meet the MIL-PRF-38535, appendix A specified RHA levels and are marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device types. The device types identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	ADG528A	8 channel analog multiplexer
02	ADG529A	Dual 4 channel analog multiplexer

1.2.3 Device class designator. The device class designator is a single letter identifying the product assurance level as follows:

<u>Device class</u>	<u>Device requirements documentation</u>
M	Vendor self-certification to the requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A
Q or V	Certification and qualification to MIL-PRF-38535

1.2.4 Case outlines. The case outlines are as designated in MIL-STD-1835 as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
V	GDIP1-T18 or CDIP2-T18	18	Dual-in-line
2	CQCC1-N20	20	Square leadless chip carrier

1.2.5 Lead finish. The lead finish is as specified in MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET <b>2</b>

1.3 Absolute maximum ratings. <sup>1/</sup>

Supply voltage range (V <sub>DD</sub> to V <sub>SS</sub> ) .....	44 V dc
V <sub>DD</sub> to GND .....	+25 V dc
V <sub>SS</sub> to GND .....	-25 V dc
Analog input voltage at S, D .....	V <sub>SS</sub> - 2 V dc to V <sub>DD</sub> + 2 V dc or 20 mA, whichever occurs first
Continuous current, S or D .....	20 mA
Pulsed current S or D ( 1 ms duration, 10 % duty cycle) .....	40 mA
Digital input voltage at A, EN, $\overline{WR}$ , $\overline{RS}$ .....	V <sub>SS</sub> - 4 V dc to V <sub>DD</sub> + 4 V dc or 20 mA, whichever occurs first
Power dissipation (P <sub>D</sub> ) at +75°C .....	470 mW <sup>2/</sup>
Storage temperature range .....	-65°C to +150°C
Lead temperature (soldering, 10 seconds) .....	+300°C
Thermal resistance, junction-to-case (θ <sub>JC</sub> ) .....	See MIL-STD-1835

1.4 Recommended operating conditions.

Operating voltage range:

V <sub>DD</sub> .....	+10.8 V dc to +16.5 V dc
V <sub>SS</sub> .....	-10.8 V dc to -16.5 V dc

Ambient operating temperature range (T<sub>A</sub>) .....

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.  
MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.  
MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at <https://assist.dla.mil/quicksearch/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

<sup>1/</sup> Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.  
<sup>2/</sup> Above +75°C, derate at 6 mW/°C.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET <b>3</b>

### 3. REQUIREMENTS

3.1 Item requirements. The individual item requirements for device classes Q and V shall be in accordance with MIL-PRF-38535 as specified herein, or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. The individual item requirements for device class M shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein for device classes Q and V or MIL-PRF-38535, appendix A and herein for device class M.

3.2.1 Case outlines. The case outlines shall be in accordance with 1.2.4 herein.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.3 Truth tables. The truth tables shall be as specified on figure 2.

3.3 Electrical performance characteristics and postirradiation parameter limits. Unless otherwise specified herein, the electrical performance characteristics and postirradiation parameter limits are as specified in table I and shall apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.

3.5 Marking. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device. For RHA product using this option, the RHA designator shall still be marked. Marking for device classes Q and V shall be in accordance with MIL-PRF-38535. Marking for device class M shall be in accordance with MIL-PRF-38535, appendix A.

3.5.1 Certification/compliance mark. The certification mark for device classes Q and V shall be a "QML" or "Q" as required in MIL-PRF-38535. The compliance mark for device class M shall be a "C" as required in MIL-PRF-38535, appendix A.

3.6 Certificate of compliance. For device classes Q and V, a certificate of compliance shall be required from a QML-38535 listed manufacturer in order to supply to the requirements of this drawing (see 6.6.1 herein). For device class M, a certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6.2 herein). The certificate of compliance submitted to DLA Land and Maritime-VA prior to listing as an approved source of supply for this drawing shall affirm that the manufacturer's product meets, for device classes Q and V, the requirements of MIL-PRF-38535 and herein or for device class M, the requirements of MIL-PRF-38535, appendix A and herein.

3.7 Certificate of conformance. A certificate of conformance as required for device classes Q and V in MIL-PRF-38535 or for device class M in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change for device class M. For device class M, notification to DLA Land and Maritime -VA of change of product (see 6.2 herein) involving devices acquired to this drawing is required for any change that affects this drawing.

3.9 Verification and review for device class M. For device class M, DLA Land and Maritime, DLA Land and Maritime's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

3.10 Microcircuit group assignment for device class M. Device class M devices covered by this drawing shall be in microcircuit group number 82 (see MIL-PRF-38535, appendix A).

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET <b>4</b>

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Dual supply section. 1/							
Analog signal range	V <sub>RANGE</sub>		1, 2, 3	All	V <sub>SS</sub>	V <sub>DD</sub>	V
Switch resistance	R <sub>ON</sub>	-10 V ≤ V <sub>S</sub> ≤ +10 V, I <sub>DS</sub> = 1 mA	1	All		450	Ω
			2, 3			600	
		V <sub>DD</sub> = +15 V (±5 %), V <sub>SS</sub> = -15 V (±5 %)	1			300	
			2, 3			400	
Off input leakage current	I <sub>S(OFF)</sub>	V1 = ±10 V, V2 = ∓ 10 V	1	All		1	nA
			2, 3			50	
Off output leakage current	I <sub>D(OFF)</sub>	V1 = ±10 V, V2 = ∓ 10 V	1	All		1	nA
			2, 3	01		100	
				02		50	
On channel leakage current	I <sub>D(ON)</sub>	V1 = ±10 V, V2 = ∓ 10 V	1	All		1	nA
			2, 3	01		100	
				02		50	
Differential off output leakage current	I <sub>DIFF</sub>	V1 = ±10 V, V2 = ∓ 10 V	1, 2, 3	02		25	nA
Input high voltage	V <sub>INH</sub>		1, 2, 3	All	2.4		V
Input low voltage	V <sub>INL</sub>		1, 2, 3	All		0.8	V
Input current, high or low	I <sub>INL</sub> or I <sub>INH</sub>	V <sub>IN</sub> = 0 V to V <sub>DD</sub>	1, 2, 3	All		1	μA

See footnotes at end of table.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET <b>5</b>

TABLE I. Electrical performance characteristics – continued.

Test	Symbol	Conditions -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Dual supply section – continued. 1/							
Digital input capacitance	C <sub>IN</sub>		4	All		8	pF
Transition delay time	t <sub>TRANS</sub>	V <sub>1</sub> = ±10 V, V <sub>2</sub> = ∓10 V, R <sub>L</sub> = 1 MΩ, C <sub>L</sub> = 35 pF 2/	9	All		300	ns
			10, 11			400	
Open time	t <sub>OPEN</sub>	R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 35 pF 2/	9	All	25		ns
			10, 11		10		
On delay time	t <sub>ON</sub>	R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 35 pF 2/	9	All		300	ns
			10, 11			400	
Off delay time	t <sub>OFF</sub>	R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 35 pF 2/	9	All		300	ns
			10, 11			400	
Write pulse width	t <sub>w</sub>	See figure 3 2/	9	All	100		ns
			10, 11		130		
Address, enable setup time	t <sub>s</sub>	See figure 3 2/	9, 10, 11	All	100		ns
Address, enable hold time	t <sub>h</sub>	See figure 3 2/	9, 10, 11	All	10		ns
Reset pulse width	t <sub>RS</sub>	See figure 3 2/	9, 10, 11	All	100		ns
Off isolation		V <sub>S</sub> = 7 V rms, f = 100 kHz, V <sub>EN</sub> = 0.8 V, R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 35 pF	4	All	50		dB
Positive supply current	I <sub>DD</sub>	V <sub>IN</sub> = V <sub>INL</sub> or V <sub>INH</sub>	1, 2, 3	All		1.5	mA
Negative supply current	I <sub>SS</sub>	V <sub>IN</sub> = V <sub>INL</sub> or V <sub>INH</sub>	1, 2, 3	All		0.2	mA

See footnotes at end of table.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET <b>6</b>

TABLE I. Electrical performance characteristics – continued.

Test	Symbol	Conditions -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Single supply section. 3/							
Analog signal range	V <sub>RANGE</sub>		1, 2, 3	All	GND	V <sub>DD</sub>	V
Switch resistance	R <sub>ON</sub>	GND ≤ V <sub>S</sub> ≤ +10 V, I <sub>DS</sub> = 0.5 mA	1	All		700	Ω
			2, 3			1000	
Off input leakage current	I <sub>S(OFF)</sub>	V1 = +10 V / GND, V2 = GND / +10 V	1	All		1	nA
			2, 3			50	
Off output leakage current	I <sub>D(OFF)</sub>	V1 = +10 V / GND, V2 = GND / +10 V	1	All		1	nA
			2, 3	01		100	
				02		50	
On channel leakage current	I <sub>D(ON)</sub>	V1 = +10 V / GND, V2 = GND / +10 V	1	All		1	nA
			2, 3	01		100	
				02		50	
Differential off output leakage current	I <sub>DIFF</sub>	V1 = +10 V / GND, V2 = GND / +10 V	1, 2, 3	02		25	nA
Input high voltage	V <sub>INH</sub>		1, 2, 3	All	2.4		V
Input low voltage	V <sub>INL</sub>		1, 2, 3	All		0.8	V
Input current, high or low	I <sub>INL</sub> or I <sub>INH</sub>	V <sub>IN</sub> = 0 V to V <sub>DD</sub>	1, 2, 3	All		1	μA
Digital input capacitance	C <sub>IN</sub>		4	All		8	pF

See footnotes at end of table.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET <b>7</b>

TABLE I. Electrical performance characteristics – continued.

Test	Symbol	Conditions -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Single supply section – continued. <u>3/</u>							
Transition delay time	t <sub>TRANS</sub>	V <sub>1</sub> = +10 V/GND, <u>2/</u> V <sub>2</sub> = GND/+10 V, R <sub>L</sub> = 1 MΩ, C <sub>L</sub> = 35 pF	9	All		450	ns
			10,11			600	
Open time	t <sub>OPEN</sub>	R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 35 pF <u>2/</u>	9	All	25		ns
			10,11		10		
On delay time	t <sub>ON</sub>	R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 35 pF <u>2/</u>	9	All		450	ns
			10,11			600	
Off delay time	t <sub>OFF</sub>	R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 35 pF <u>2/</u>	9	All		450	ns
			10,11			600	
Write pulse width	t <sub>W</sub>	See figure 3 <u>2/</u>	9	All	100		ns
			10,11		130		
Address, enable setup time	t <sub>S</sub>	See figure 3 <u>2/</u>	9,10,11	All	100		ns
Address, enable hold time	t <sub>H</sub>	See figure 3 <u>2/</u>	9,10,11	All	10		ns
Reset pulse width	t <sub>RS</sub>	See figure 3 <u>2/</u>	9,10,11	All	100		ns
Off isolation		V <sub>S</sub> = 3.5 V rms, f = 100 kHz, V <sub>EN</sub> = 0.8 V, R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 15 pF	4	All	50		dB
Positive supply current	I <sub>DD</sub>	V <sub>IN</sub> = V <sub>INL</sub> or V <sub>INH</sub>	1,2,3	All		1.5	mA
Functional tests	FT	See paragraph 4.4.1d	7,8	All			

- 1/ For dual supply section, unless otherwise specified, V<sub>DD</sub> = +10.8 V to +16.5 V, V<sub>SS</sub> = -10.8 V to -16.5 V.  
 2/ For subgroups 10 and 11, parameter is guaranteed to the specified limit but not tested.  
 3/ For single supply section, unless otherwise specified, V<sub>DD</sub> = +10.8 V to +16.5 V, V<sub>SS</sub> = GND = 0 V.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET 8

Device types	01		02	
Case outlines	V	2	V	2
Terminal number	Terminal symbol			
1	$\overline{WR}$	NC	$\overline{WR}$	NC
2	A0	$\overline{WR}$	A0	$\overline{WR}$
3	EN	A0	EN	A0
4	V <sub>SS</sub>	EN	V <sub>SS</sub>	EN
5	S1	V <sub>SS</sub>	S1A	V <sub>SS</sub>
6	S2	S1	S2A	S1A
7	S3	S2	S3A	S2A
8	S4	S3	S4A	S3A
9	D	S4	DA	S4A
10	S8	D	DB	DA
11	S7	NC	S4B	NC
12	S6	S8	S3B	DB
13	S5	S7	S2B	S4B
14	V <sub>DD</sub>	S6	S1B	S3B
15	GND	S5	V <sub>DD</sub>	S2B
16	A2	V <sub>DD</sub>	GND	S1B
17	A1	GND	A1	V <sub>DD</sub>
18	$\overline{RS}$	A2	$\overline{RS}$	GND
19	---	A1	---	A1
20	---	$\overline{RS}$	---	$\overline{RS}$

FIGURE 1. Terminal connections.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET 9

Device type 01

A2	A1	A0	EN	$\overline{WR}$	$\overline{RS}$	ON switch pair
X	X	X	X	↑	1	Retains previous switch condition
X	X	X	X	X	0	NONE (address and enable latches cleared)
X	X	X	0	0	1	NONE
0	0	0	1	0	1	1
0	0	1	1	0	1	2
0	1	0	1	0	1	3
0	1	1	1	0	1	4
1	0	0	1	0	1	5
1	0	1	1	0	1	6
1	1	0	1	0	1	7
1	1	1	1	0	1	8

Device type 02

A1	A0	EN	$\overline{WR}$	$\overline{RS}$	ON switch pair
X	X	X	↑	1	Retains previous switch condition
X	X	X	X	0	NONE (address and enable latches cleared)
X	X	0	0	1	NONE
0	0	1	0	1	1
0	1	1	0	1	2
1	0	1	0	1	3
1	1	1	0	1	4

Note: X = Don't care

FIGURE 2. Truth tables.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET 10

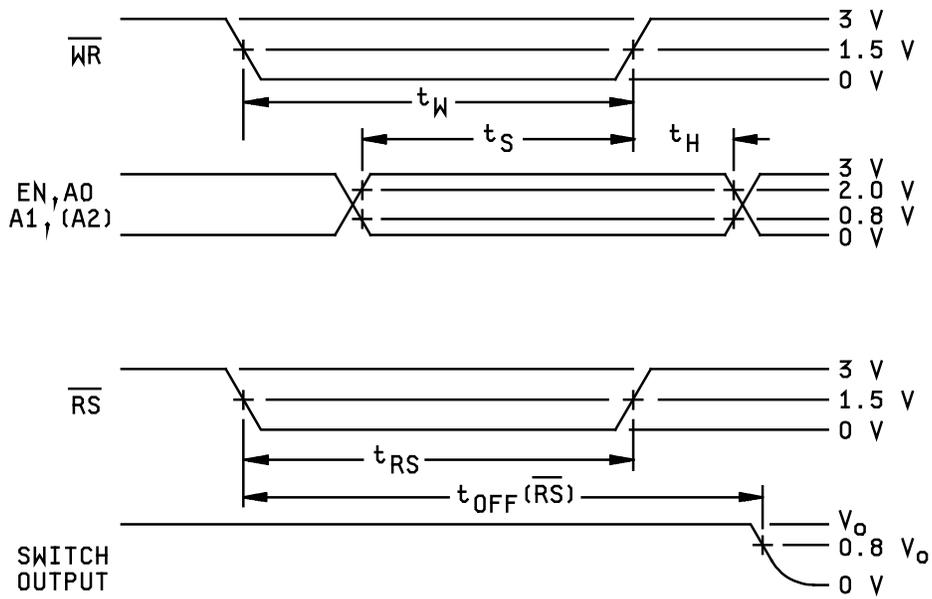


FIGURE 3. Timing waveforms.

**STANDARD  
MICROCIRCUIT DRAWING**  
DLA LAND AND MARITIME  
COLUMBUS, OHIO 43218-3990

SIZE  
**A**

REVISION LEVEL  
**B**

**5962-90635**

SHEET  
11

4. VERIFICATION

4.1 Sampling and inspection. For device classes Q and V, sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. For device class M, sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. For device classes Q and V, screening shall be in accordance with MIL-PRF-38535, and shall be conducted on all devices prior to qualification and technology conformance inspection. For device class M, screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection.

4.2.1 Additional criteria for device class M.

- a. Burn-in test, method 1015 of MIL-STD-883.
  - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.
  - (2)  $T_A = +125^{\circ}\text{C}$ , minimum.
- b. Interim and final electrical test parameters shall be as specified in table II herein.

4.2.2 Additional criteria for device classes Q and V.

- a. The burn-in test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document revision level control of the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.
- b. Interim and final electrical test parameters shall be as specified in table II herein.
- c. Additional screening for device class V beyond the requirements of device class Q shall be as specified in MIL-PRF-38535, appendix B.

4.3 Qualification inspection for device classes Q and V. Qualification inspection for device classes Q and V shall be in accordance with MIL-PRF-38535. Inspections to be performed shall be those specified in MIL-PRF-38535 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4 Conformance inspection. Technology conformance inspection for classes Q and V shall be in accordance with MIL-PRF-38535 including groups A, B, C, D, and E inspections and as specified herein. Quality conformance inspection for device class M shall be in accordance with MIL-PRF-38535, appendix A and as specified herein. Inspections to be performed for device class M shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET 12

4.4.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. Subgroup 4 tests performed on initial release and after any major change which may affect the parameter.
- c. Subgroups 5 and 6 in table I, method 5005 of MIL-STD-883 shall be omitted.
- d. For device class M, subgroups 7 and 8 tests shall be sufficient to verify the truth table. For device classes Q and V, subgroups 7 and 8 shall include verifying the functionality of the device.

TABLE II. Electrical test requirements.

Test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)	Subgroups (in accordance with MIL-PRF-38535, table III)	
	Device class M	Device class Q	Device class V
Interim electrical parameters (see 4.2)	---	---	---
Final electrical parameters (see 4.2)	1, 2, 3, 7, 8, 9, 10, 11 <u>1/</u>	1, 2, 3, 7, 8, 9, 10, 11 <u>1/</u>	1, 2, 3, 7, 8, 9, 10, 11 <u>1/</u>
Group A test requirements (see 4.4)	1, 2, 3, 4, 7, 8, 9, 10, 11	1, 2, 3, 4, 7, 8, 9, 10, 11	1, 2, 3, 4, 7, 8, 9, 10, 11
Group C end-point electrical parameters (see 4.4)	1	1	1, 2, 3, 4, 7, 8, 9, 10, 11
Group D end-point electrical parameters (see 4.4)	1	1	1
Group E end-point electrical parameters (see 4.4)	---	---	---

1/ PDA applies to subgroup 1.

4.4.2 Group C inspection. The group C inspection end-point electrical parameters shall be as specified in table II herein.

4.4.2.1 Additional criteria for device class M. Steady-state life test conditions, method 1005 of MIL-STD-883:

- a. Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.
- b.  $T_A = +125^\circ\text{C}$ , minimum.
- c. Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.4.2.2 Additional criteria for device classes Q and V. The steady-state life test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The test circuit shall be maintained under document revision level control by the device manufacturer's TRB in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET 13

4.4.3 Group D inspection. The group D inspection end-point electrical parameters shall be as specified in table II herein.

4.4.4 Group E inspection. Group E inspection is required only for parts intended to be marked as radiation hardness assured (see 3.5 herein).

- a. End-point electrical parameters shall be as specified in table II herein.
- b. For device classes Q and V, the devices or test vehicle shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535 for the RHA level being tested. For device class M, the devices shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535, appendix A for the RHA level being tested. All device classes must meet the postirradiation end-point electrical parameter limits as defined in table I at  $T_A = +25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , after exposure, to the subgroups specified in table II herein.

## 5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

## 6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.1.1 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor prepared specification or drawing.

6.1.2 Substitutability. Device class Q devices will replace device class M devices.

6.2 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished using DD Form 1692, Engineering Change Proposal.

6.3 Record of users. Military and industrial users should inform DLA Land and Maritime when a system application requires configuration control and which SMD's are applicable to that system. DLA Land and Maritime will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DLA Land and Maritime -VA, telephone (614) 692-0544.

6.4 Comments. Comments on this drawing should be directed to DLA Land and Maritime -VA, Columbus, Ohio 43218-3990, or telephone (614) 692-0540.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535 and MIL-HDBK-1331.

6.6 Sources of supply.

6.6.1 Sources of supply for device classes Q and V. Sources of supply for device classes Q and V are listed in QML-38535. The vendors listed in QML-38535 have submitted a certificate of compliance (see 3.6 herein) to DLA Land and Maritime -VA and have agreed to this drawing.

6.6.2 Approved sources of supply for device class M. Approved sources of supply for class M are listed in MIL-HDBK-103. The vendors listed in MIL-HDBK-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DLA Land and Maritime -VA.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-90635</b>
		REVISION LEVEL <b>B</b>	SHEET 14

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 12-08-01

Approved sources of supply for SMD 5962-90635 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DLA Land and Maritime -VA. This information bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535. DLA Land and Maritime maintains an online database of all current sources of supply at <http://www.landandmaritime.dla.mil/Programs/Smcr/>.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
5962-9063501MVA	24355 (4)	ADG528ATQ/883B
5962-9063501M2A	<u>3/</u>	ADG528ATE/883B
5962-9063502MVA	24355 (3)	ADG529ATQ/883B
5962-9063502M2A	24355 (3)	ADG529ATE/883B

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.
- 2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.
- 3/ Not available from an approved source of supply.

Vendor CAGE  
number

Vendor name  
and address

24355 (3)

Analog Devices  
Route 1 Industrial Park  
P.O. Box 9106  
Norwood, MA 02062  
Point of contact: Raheen Business Park  
Limerick, Ireland

24355 (4)

Analog Devices  
Route 1 Industrial Park  
P.O. Box 9106  
Norwood, MA 02062  
Point of contact: 7910 Traid Center Drive  
Greensboro, NC 27409-9605

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.